




**PRODUCT DIMENSIONS & SPECIFICATIONS**

**DX-TREME CC SERIES LIGHT COMMERCIAL  
CASED UPFLOW COILS**

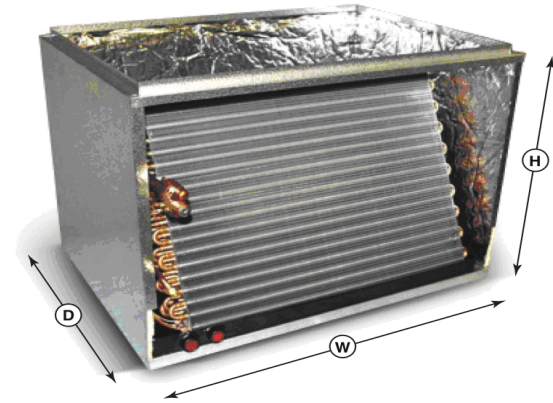

Unit shown with service panels removed. Representative drawing only.  
Some models may vary in appearance.

**STANDARD SPECIFICATIONS**

- Rifled copper tubing, aluminum fins.
- Immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- 3/4" FPT plumbing connections
- Left-hand refrigerant and plumbing connections.
- Factory-mounted R410a TXV.
- Powder-painted galvanized steel drain pans. Stainless available.
- Embossed galvanized cabinets standard. Cabinets feature furnace connectors (patent pending).
- Upflow only. (Slab horizontal coils also available.)
- Split access doors in front for easy service.
- Fully insulated cabinets with faced insulation.
- Ten-year limited warranty.
- ETL listed for use with R410a when proper metering device is used.

COIL MODEL	DIMENSIONS						SHIPPING INFORMATION		LIST PRICE
	CABINET WIDTH (W)		CABINET DEPTH (D)	CABINET HEIGHT (H)	SUCTION LINE	LIQUID LINE	SHIP WT (LBS.)	SKID QTY	
	MIN WIDTH	MAX WIDTH							

*Single circuit coils*

CC072A34-XXXX-000	30	36	21-1/2	22	7/8	3/8	84	4	\$694
CC072B34-XXXX-000	36	42	21-1/2	22	7/8	3/8	105	4	\$785
CC072C34-XXXX-000	42	48	21-1/2	22	7/8	3/8	126	4	\$828
CC090A34-XXXX-000	36	42	21-1/2	22	1-1/8	1/2	105	4	\$852
CC090B34-XXXX-000	42	48	21-1/2	22	1-1/8	1/2	126	4	\$917
CC090C34-XXXX-000	48	54	21-1/2	22	1-1/8	1/2	147	4	\$984
CC120A34-XXXX-000	36	42	21-1/2	22	1-1/8	1/2	105	4	\$906
CC120B34-XXXX-000	42	48	21-1/2	22	1-1/8	1/2	126	4	\$960
CC120C34-XXXX-000	48	54	21-1/2	22	1-1/8	1/2	147	4	\$1,023

*Double circuit coils*

CC072A44-XXXX-120	30	36	21-1/2	22	7/8	3/8	103	4	\$925
CC072B44-XXXX-120	36	42	21-1/2	22	7/8	3/8	128	4	\$1,047
CC072C44-XXXX-120	42	48	21-1/2	22	7/8	3/8	154	4	\$1,104
CC090A44-XXXX-120	36	42	21-1/2	22	1-1/8	1/2	128	4	\$1,136
CC090B44-XXXX-120	42	48	21-1/2	22	1-1/8	1/2	154	4	\$1,223
CC090C44-XXXX-120	48	54	21-1/2	22	1-1/8	1/2	180	4	\$1,312
CC120A44-XXXX-120	36	42	21-1/2	22	1-1/8	1/2	128	4	\$1,208
CC120B44-XXXX-120	42	48	21-1/2	22	1-1/8	1/2	154	4	\$1,280
CC120C44-XXXX-120	48	54	21-1/2	22	1-1/8	1/2	180	4	\$1,364

Notes: Slabs are oriented with delta plates facing the side walls of the cabinet. Refrigerant and plumbing connections exit cabinet front. Top duct opening size can be obtained by subtracting 1-1/2 from width or depth. Bottom duct opening size can be obtained by subtracting 3/4 from width or depth.

800-423-9007  
ASPENMFG.COM

R-410a  
READY

AUDI  
MEMBER



Proud Member Of  
**HARDI**  
HEATING, AIR-CONDITIONING & REFRIGERATION DISTRIBUTORS INTERNATIONAL

ASSEMBLED  
IN THE USA

EVERYTHING'S  
RIGHT HERE™