


DIMENSIONS AND SPECIFICATIONS

Aspen BB Series Horizontal Coils with Ductboard Plenums

Designed to Fit Aire-Flo MPG Furnaces

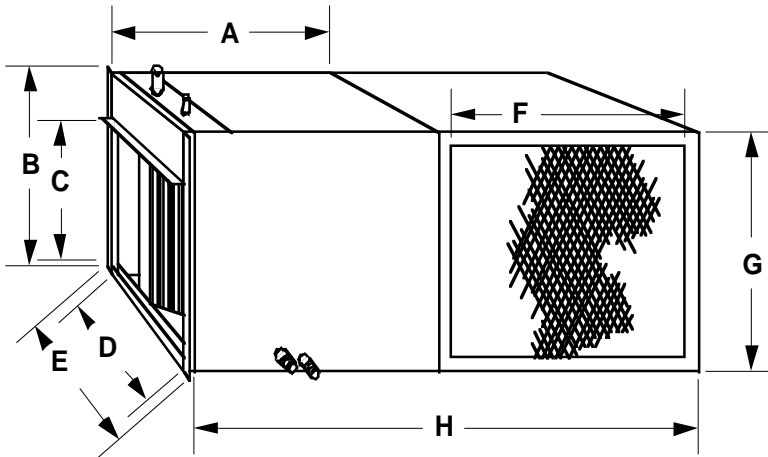

COIL SPECIFICATIONS

- (Representative drawing only. Some models may vary in appearance.)
- ¥ Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
 - ¥ Refrigerant lines exit from the top of the coil.
 - ¥ Four 3/4" FPT galvanized condensate drains (two per side).
 - ¥ Powder-painted galvanized steel drain pan.
 - ¥ Inlet and outlet dimensions are identical (without end caps).
 - ¥ Five-year warranty.
 - ¥ Flowrater standard. Factory or field-installable TXV available.
 - ¥ Top access panel for easy service.
 - ¥ Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
 - ¥ Rifled copper tubing, enhanced aluminum fins.
 - ¥ ARI certifiable with all brands of A/C and heat pump systems.
 - ¥ ETL listed.

OPTIONAL PLENUM SPECIFICATIONS

- ¥ Slips over either end of coil.
- ¥ Rectangular shape offers maximum surface area for duct connections.
- ¥ Plenum sides and top constructed of foil-backed fiberglass ductboard or sheet metal.
- ¥ Plenum end and bottom constructed of galvanized steel.

AIRE-FLO FURNACE MODEL	COIL + PLENUM MODEL	END CAP MODEL	COIL OVERALL		COIL INLET (END CAPS INSTALLED)		COIL WIDTH E	PLENUM		COIL + PLENUM SIZE H	WT (LBS)
			A	B	C	D		F	G		
MPGA050B3 MPGA075B3	BBL 24+PLL 24	DUCA01	22-3/4	16-3/4	13-1/2	20-5/8	22	17-3/4	16-7/8	40	46
	BBL 30+PLL 30	DUCA01	22-3/4	16-3/4	13-1/2	20-5/8	22	17-3/4	16-7/8	40	46
	BBL 31+PLL 31	DUCA01	22-3/4	16-3/4	13-1/2	20-5/8	22	17-3/4	16-7/8	40	46
	BBL 36+PLL 36	DUCA01	22-3/4	16-3/4	13-1/2	20-5/8	22	17-3/4	16-7/8	40	50
	BBL 37+PLL 37	DUCA01	22-3/4	16-3/4	13-1/2	20-5/8	22	17-3/4	16-7/8	40	50
	BBH 36+PLH 36	DUCA02	22-3/4	20-3/4	13-1/2	20-5/8	22	17-3/4	20-7/8	40	51
	BBH 37+PLH 37	DUCA02	22-3/4	20-3/4	13-1/2	20-5/8	22	17-3/4	20-7/8	40	51
	BBH 48+PLH 48	DUCA08	22-3/4	22-3/4	13-1/2	20-5/8	22	17-3/4	22-7/8	40	56
MPGA075B4 MPGA100B4	BBL 48+PLL 48	DUCA03	22-3/4	18-3/4	17	20-5/8	22	17-3/4	18-7/8	40	56
	BBL 49+PLL 49	DUCA03	22-3/4	18-3/4	17	20-5/8	22	17-3/4	18-7/8	40	56
	BBH 48+PLH 48	DUCA04	22-3/4	22-3/4	17	20-5/8	22	17-3/4	22-7/8	40	56
	BBH 49+PLH 49	DUCA04	22-3/4	22-3/4	17	20-5/8	22	17-3/4	22-7/8	40	56
	BBL 60+PLL 60	DUCA04	22-3/4	22-3/4	17	20-5/8	22	17-3/4	22-7/8	40	60
	BBL 61+PLL 61	DUCA04	22-3/4	22-3/4	17	20-5/8	22	17-3/4	22-7/8	40	60
	BBH 60+PLH 60	DUCA07	22-3/4	26-3/4	17	20-5/8	22	17-3/4	26-7/8	40	60
	BBH 61+PLH 61	DUCA07	22-3/4	26-3/4	17	20-5/8	22	17-3/4	26-7/8	40	60
MPGA100B5 MPGA125B5	BBL 60+PLL 60	DUCA06	22-3/4	22-3/4	20-1/2	20-5/8	22	17-3/4	22-7/8	40	60
	BBL 61+PLL 61	DUCA06	22-3/4	22-3/4	20-1/2	20-5/8	22	17-3/4	22-7/8	40	60
	BBH 60+PLH 60	DUCA05	22-3/4	26-3/4	20-1/2	20-5/8	22	17-3/4	26-7/8	40	61
	BBH 61+PLH 61	DUCA05	22-3/4	26-3/4	20-1/2	20-5/8	22	17-3/4	26-7/8	40	61

BB +PL Spec-Aire-Flo MPG 2. Effective 8/16/02. Supersedes all previous versions. Subject to change without notice.