


DIMENSIONS AND SPECIFICATIONS

Aspen VersaCoil Cased Multi-Position Coils

Designed to Fit Aire-Flo MPG Furnaces

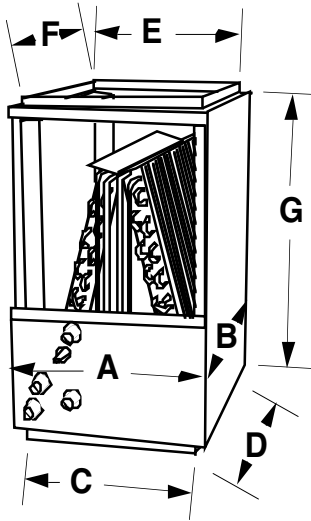

GENERAL SPECIFICATIONS

(Coil shown in vertical configuration with front access panel removed.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS.
- Left-hand refrigerant and plumbing connections.
- Three 3/4" MPT condensate drains. Dual drain in vertical or horizontal position.
- No field-modification required for multi-position applications.
- Factory pre-installed powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

AIRE-FLO FURNACE MODEL	ASPEN COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT G
			A	B	C	D	E	F	
MPGA050B3 MPGA075B3	BVR** 24	B6A15	14	22-1/8	11-3/4	20-5/8	11-3/4	20-5/8	15
	BV1** 24	B6A21	14	22-1/8	11-3/4	20-5/8	11-3/4	20-5/8	21
	BVR** 30	B6A21	14	22-1/8	11-3/4	20-5/8	11-3/4	20-5/8	21
	BVR** 36	B6A21	14	22-1/8	11-3/4	20-5/8	11-3/4	20-5/8	21
	BV5** 36	B6A21	14	22-1/8	11-3/4	20-5/8	11-3/4	20-5/8	21
MPGA075B4 MPGA100B4	BVR** 42	B6B23	17	22-1/8	15-1/4	20-5/8	15-1/4	20-5/8	23
	BVR** 48	B6B23	17	22-1/8	15-1/4	20-5/8	15-1/4	20-5/8	23
	BV5** 48	B6B29	17	22-1/8	15-1/4	20-5/8	15-1/4	20-5/8	29
	BV7** 60	B6B29	17	22-1/8	15-1/4	20-5/8	15-1/4	20-5/8	29
	BV2** 60	B6E29	17	23	15-1/4	20-5/8	15-1/4	20-5/8	29
MPGA100B5 MPGA125B5	BV1** 60	B6C29	20-1/2	22-1/8	18-3/4	20-5/8	18-3/4	20-5/8	29
	BV7** 60	B6C29	20-1/2	22-1/8	18-3/4	20-5/8	18-3/4	20-5/8	29
	BV2** 60	B6D29	20-1/2	23	18-3/4	20-5/8	18-3/4	20-5/8	29