




**ASPEN**  
MANUFACTURING

373 ATASCOCITA RD. • HUMBLE, TX • 77396  
TEL (281) 441-6500 • FAX (281) 441-6510  
<< www.aspenmfg.com >>

## DIMENSIONS AND SPECIFICATIONS

### Aspen VersaCoil Cased Multi-Position Coils

Designed for American Standard AUD-C Upflow/Horizontal Furnaces

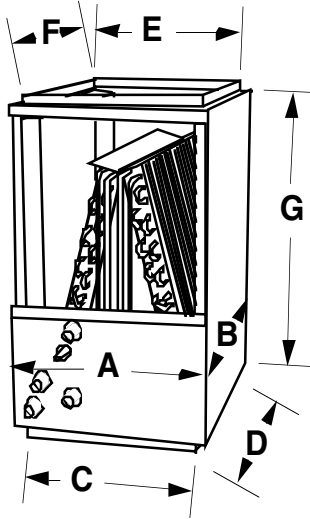

#### GENERAL SPECIFICATIONS

(Coil shown in vertical configuration with front access panel removed.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Left-hand refrigerant and plumbing connections.
- Three 3/4" MPT condensate drains. Dual drain in vertical or horizontal position.
- No field-modification required for multi-position applications.
- Factory pre-installed powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy guage embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

| FURNACE MODEL  | ASPEN COIL MODEL | SUFFIX | FOOTPRINT |        | BOTTOM OPENING |        | TOP OPENING |        | HT |
|--|------------------|--------|-----------|--------|----------------|--------|-------------|--------|----|
|  |                  |        | A         | B      | C              | D      | E           | F      | G  |
| AUD040C924<br>AUD040C930<br>AUD060C924<br>AUD060C936               | BVR** 24         | B4Q15  | 14-1/2    | 21-3/8 | 13-1/2         | 19-7/8 | 12-3/4      | 18-3/4 | 15 |
|  | BV1** 24         | B4Q21  | 14-1/2    | 21-3/8 | 13-1/2         | 19-7/8 | 12-3/4      | 18-3/4 | 21 |
|  | BVR** 30         | B4Q21  | 14-1/2    | 21-3/8 | 13-1/2         | 19-7/8 | 12-3/4      | 18-3/4 | 21 |
|  | BV1** 30         | B4Q21  | 14-1/2    | 21-3/8 | 13-1/2         | 19-7/8 | 12-3/4      | 18-3/4 | 21 |
|  | BVR** 36         | B4Q21  | 14-1/2    | 21-3/8 | 13-1/2         | 19-7/8 | 12-3/4      | 18-3/4 | 21 |
|  | BV5** 36         | B4Q21  | 14-1/2    | 21-3/8 | 13-1/2         | 19-7/8 | 12-3/4      | 18-3/4 | 21 |
| AUD080C924<br>AUD080C936<br>AUD080C948<br>AUD100C936<br>AUD100C945 | BVR** 24         | B4R15  | 17-1/2    | 21-3/8 | 16-1/2         | 19-7/8 | 15-3/4      | 18-3/4 | 15 |
|  | BV1** 24         | B4R21  | 17-1/2    | 21-3/8 | 16-1/2         | 19-7/8 | 15-3/4      | 18-3/4 | 21 |
|  | BVR** 30         | B4R21  | 17-1/2    | 21-3/8 | 16-1/2         | 19-7/8 | 15-3/4      | 18-3/4 | 21 |
|  | BV1** 30         | B4R21  | 17-1/2    | 21-3/8 | 16-1/2         | 19-7/8 | 15-3/4      | 18-3/4 | 21 |
|  | BVR** 36         | B4R21  | 17-1/2    | 21-3/8 | 16-1/2         | 19-7/8 | 15-3/4      | 18-3/4 | 21 |
|  | BV5** 36         | B4R21  | 17-1/2    | 21-3/8 | 16-1/2         | 19-7/8 | 15-3/4      | 18-3/4 | 21 |
| AUD100C948<br>AUD100C960<br>AUD120C954                             | BV1** 48         | B4R29  | 17-1/2    | 21-3/8 | 16-1/2         | 19-7/8 | 15-3/4      | 18-3/4 | 29 |
|  | BVR** 42         | B4S23  | 21        | 21-3/8 | 20             | 19-7/8 | 19-1/4      | 18-3/4 | 23 |
|  | BV5** 42         | B4S23  | 21        | 21-3/8 | 20             | 19-7/8 | 19-1/4      | 18-3/4 | 23 |
|  | BVR** 48         | B4S23  | 21        | 21-3/8 | 20             | 19-7/8 | 19-1/4      | 18-3/4 | 23 |
|  | BV1** 48         | B4S29  | 21        | 21-3/8 | 20             | 19-7/8 | 19-1/4      | 18-3/4 | 29 |
|  | BV5** 48         | B4S29  | 21        | 21-3/8 | 20             | 19-7/8 | 19-1/4      | 18-3/4 | 29 |
|  | BV1** 60         | B4S29  | 21        | 21-3/8 | 20             | 19-7/8 | 19-1/4      | 18-3/4 | 29 |
| BV2** 60   | BTA29            | 21     | 23        | 20     | 19-7/8         | 19-1/4 | 18-3/4      | 29     |    |
| AUD100C972<br>AUD120C960<br>AUD140C960                             | BV7** 60         | B4S29  | 21        | 21-3/8 | 20             | 19-7/8 | 19-1/4      | 18-3/4 | 29 |
|  | BVR** 42         | B4T23  | 24-1/2    | 21-3/8 | 23-1/2         | 19-7/8 | 22-3/4      | 18-3/4 | 23 |
|  | BV5** 42         | B4T23  | 24-1/2    | 21-3/8 | 23-1/2         | 19-7/8 | 22-3/4      | 18-3/4 | 23 |
|  | BVR** 48         | B4T23  | 24-1/2    | 21-3/8 | 23-1/2         | 19-7/8 | 22-3/4      | 18-3/4 | 23 |
|  | BV1** 48         | B4T29  | 24-1/2    | 21-3/8 | 23-1/2         | 19-7/8 | 22-3/4      | 18-3/4 | 29 |
|  | BV5** 48         | B4T29  | 24-1/2    | 21-3/8 | 23-1/2         | 19-7/8 | 22-3/4      | 18-3/4 | 29 |
|  | BV1** 60         | B4T29  | 24-1/2    | 21-3/8 | 23-1/2         | 19-7/8 | 22-3/4      | 18-3/4 | 29 |
| BV2** 60   | B4W29            | 24-1/2 | 23        | 23-1/2 | 19-7/8         | 22-3/4 | 18-3/4      | 29     |    |
| BV7** 60   | B4T29            | 24-1/2 | 21-3/8    | 23-1/2 | 19-7/8         | 22-3/4 | 18-3/4      | 29     |    |

Versa Spec-American Standard B. Effective 12/1905. Supersedes all previous versions. Subject to change without notice.