




ASPEN
MANUFACTURING

373 ATASCOCITA RD. • HUMBLE, TX • 77396
TEL (281) 441-6500 • FAX (281) 441-6510
<< www.aspenmfg.com >>

DIMENSIONS AND SPECIFICATIONS

Aspen VersaCoil Cased Multi-Position Coils

Designed for American Standard AUD-C Upflow/Horizontal Furnaces

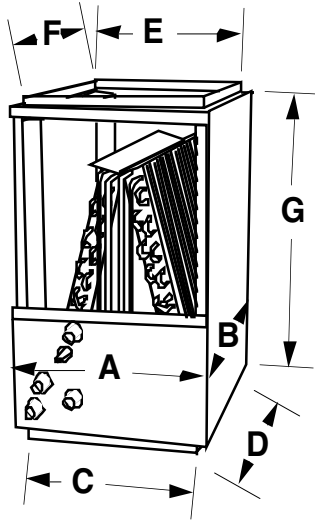

GENERAL SPECIFICATIONS

(Coil shown in vertical configuration with front access panel removed.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Left-hand refrigerant and plumbing connections.
- Three 3/4" MPT condensate drains. Dual drain in vertical or horizontal position.
- No field-modification required for multi-position applications.
- Factory pre-installed powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

FURNACE MODEL	ASPEN COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HT
			A	B	C	D	E	F	
AUD040C924 AUD040C930 AUD060C924 AUD060C936	BVR** 24	B4Q15	14-1/2	21-3/8	13-1/2	19-7/8	13-1/2	19-7/8	15
	BV1** 24	B4Q21	14-1/2	21-3/8	13-1/2	19-7/8	13-1/2	19-7/8	21
	BVR** 30	B4Q21	14-1/2	21-3/8	13-1/2	19-7/8	13-1/2	19-7/8	21
	BV1** 30	B4Q21	14-1/2	21-3/8	13-1/2	19-7/8	13-1/2	19-7/8	21
	BVR** 36	B4Q21	14-1/2	21-3/8	13-1/2	19-7/8	13-1/2	19-7/8	21
	BV5** 36	B4Q21	14-1/2	21-3/8	13-1/2	19-7/8	13-1/2	19-7/8	21
AUD080C924 AUD080C936 AUD080C948 AUD100C936 AUD100C945	BVR** 24	B4R15	17-1/2	21-3/8	16-1/2	19-7/8	16-1/2	19-7/8	15
	BV1** 24	B4R21	17-1/2	21-3/8	16-1/2	19-7/8	16-1/2	19-7/8	21
	BVR** 30	B4R21	17-1/2	21-3/8	16-1/2	19-7/8	16-1/2	19-7/8	21
	BV1** 30	B4R21	17-1/2	21-3/8	16-1/2	19-7/8	16-1/2	19-7/8	21
	BVR** 36	B4R21	17-1/2	21-3/8	16-1/2	19-7/8	16-1/2	19-7/8	21
	BV5** 36	B4R21	17-1/2	21-3/8	16-1/2	19-7/8	16-1/2	19-7/8	21
AUD100C948 AUD100C960 AUD120C954	BVR** 42	B4S23	21	21-3/8	20	19-7/8	20	19-7/8	23
	BV5** 42	B4S23	21	21-3/8	20	19-7/8	20	19-7/8	23
	BVR** 48	B4S23	21	21-3/8	20	19-7/8	20	19-7/8	23
	BV1** 48	B4S29	21	21-3/8	20	19-7/8	20	19-7/8	29
	BV5** 48	B4S29	21	21-3/8	20	19-7/8	20	19-7/8	29
	BV1** 60	B4S29	21	21-3/8	20	19-7/8	20	19-7/8	29
	BV2** 60	BTA29	21	23	20	19-7/8	20	21-1/2	29
	BV7** 60	B4S29	21	21-3/8	20	19-7/8	20	19-7/8	29
AUD100C972 AUD120C960 AUD140C960	BVR** 42	B4T23	24-1/2	21-3/8	23-1/2	19-7/8	23-1/2	19-7/8	23
	BV5** 42	B4T23	24-1/2	21-3/8	23-1/2	19-7/8	23-1/2	19-7/8	23
	BVR** 48	B4T23	24-1/2	21-3/8	23-1/2	19-7/8	23-1/2	19-7/8	23
	BV1** 48	B4T29	24-1/2	21-3/8	23-1/2	19-7/8	23-1/2	19-7/8	29
	BV5** 48	B4T29	24-1/2	21-3/8	23-1/2	19-7/8	23-1/2	19-7/8	29
	BV1** 60	B4T29	24-1/2	21-3/8	23-1/2	19-7/8	23-1/2	19-7/8	29
	BV2** 60	B4W29	24-1/2	23	23-1/2	19-7/8	23-1/2	21-1/2	29
	BV7** 60	B4T29	24-1/2	21-3/8	23-1/2	19-7/8	23-1/2	19-7/8	29

Versa Spec-American Standard B. Effective 11/20/01. Supercedes all previous versions. Subject to change without notice.