


DIMENSIONS AND SPECIFICATIONS

Aspen VersaCoil Cased Multi-Position Coils

Designed for Armstrong G1N80AU Upflow and G1N80AT Upflow/Horizontal and G1N80AR Counterflow/Horizontal Furnaces

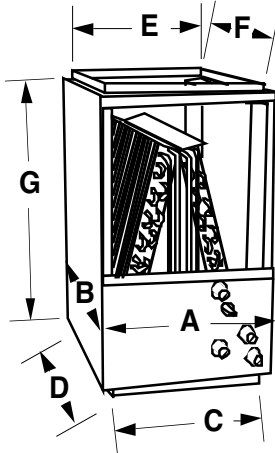

GENERAL SPECIFICATIONS

(Coil shown in vertical configuration with front access panel removed.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Right-hand refrigerant and plumbing connections.
- Three 3/4" MPT condensate drains. Dual drain in vertical or horizontal position.
- No field-modification required for multi-position applications.
- Factory pre-installed powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

ARMSTRONG FURNACE MODEL	ASPEN COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
G1N80AU050D12A	BV1** 24	BFA21	14-3/4	21-1/4	13-3/4	19-3/4	13	18	21
G1N80AU075D12A	BVR** 24	BFA15	14-3/4	21-1/4	13-3/4	19-3/4	13	18	15
G1N80AT050D12A	BV1** 30	BFA21	14-3/4	21-1/4	13-3/4	19-3/4	13	18	21
G1N80AT075D12A	BVR** 30	BFA21	14-3/4	21-1/4	13-3/4	19-3/4	13	18	21
G1N80AR050D12A	BV5** 36	BFA21	14-3/4	21-1/4	13-3/4	19-3/4	13	18	21
G1N80AR075D12A	BVR** 36	BFA21	14-3/4	21-1/4	13-3/4	19-3/4	13	18	21
G1N80AU075D16B	BV1** 24	BFB19	17-3/4	21-1/4	16-3/4	19-3/4	16	18	19
	BVR** 24	BFB19	17-3/4	21-1/4	16-3/4	19-3/4	16	18	19
G1N80AU100D14B	BV1** 30	BFB19	17-3/4	21-1/4	16-3/4	19-3/4	16	18	19
	BVR** 30	BFB19	17-3/4	21-1/4	16-3/4	19-3/4	16	18	19
G1N80AT075D16B	BV5** 36	BFB25	17-3/4	21-1/4	16-3/4	19-3/4	16	18	25
	BVR** 36	BFB19	17-3/4	21-1/4	16-3/4	19-3/4	16	18	19
G1N80AT100D14B	BV5** 42	BFB25	17-3/4	21-1/4	16-3/4	19-3/4	16	18	25
	BVR** 42	BFB25	17-3/4	21-1/4	16-3/4	19-3/4	16	18	25
G1N80AR075D16B	BV5** 48	BFB25	17-3/4	21-1/4	16-3/4	19-3/4	16	18	25
	BVR** 48	BFB25	17-3/4	21-1/4	16-3/4	19-3/4	16	18	25
G1N80AU100D20C	BV1** 30	BFC23	21-1/4	21-1/4	20-1/4	19-3/4	19-1/2	18	23
	BVR** 30	BFC17	21-1/4	21-1/4	20-1/4	19-3/4	19-1/2	18	17
G1N80AU125D20C	BV5** 36	BFC23	21-1/4	21-1/4	20-1/4	19-3/4	19-1/2	18	23
	BVR** 36	BFC23	21-1/4	21-1/4	20-1/4	19-3/4	19-1/2	18	23
G1N80AT100D20C	BV5** 42	BFC23	21-1/4	21-1/4	20-1/4	19-3/4	19-1/2	18	23
G1N80AT100D22C	BVR** 42	BFC23	21-1/4	21-1/4	20-1/4	19-3/4	19-1/2	18	23
G1N80AT125D20C	BV1** 48	BFC29	21-1/4	21-1/4	20-1/4	19-3/4	19-1/2	18	29
	BV5** 48	BFC29	21-1/4	21-1/4	20-1/4	19-3/4	19-1/2	18	29
G1N80AR100D20C	BVR** 48	BFC23	21-1/4	21-1/4	20-1/4	19-3/4	19-1/2	18	23
	BV1** 60	BFC29	21-1/4	21-1/4	20-1/4	19-3/4	19-1/2	18	29
G1N80AR125D20C	BV7** 60	BFC29	21-1/4	21-1/4	20-1/4	19-3/4	19-1/2	18	29
	BV2** 60	BFE29	21-1/4	23	20-1/4	19-3/4	19-1/2	18	29
G1N80AU150D20D	BV1** 48	BFD29	24-3/4	21-1/4	23-3/4	19-3/4	23	18	29
	BV5** 48	BFD29	24-3/4	21-1/4	23-3/4	19-3/4	23	18	29
G1N80AR150D20D	BVR** 48	BFD23	24-3/4	21-1/4	23-3/4	19-3/4	23	18	23
	BV1** 60	BFD29	24-3/4	21-1/4	23-3/4	19-3/4	23	18	29
	BV7** 60	BFD29	24-3/4	21-1/4	23-3/4	19-3/4	23	18	29
	BV2** 60	BFF29	24-3/4	23	23-3/4	19-3/4	23	18	29

Versa Spec-Armstrong B G1N80. Effective 6/4/02. Supersedes all previous versions. Subject to change without notice.