


DIMENSIONS AND SPECIFICATIONS

Aspen VersaCoil Cased Multi-Position Coils

Designed to Fit Under Armstrong MB Series Modular Blowers

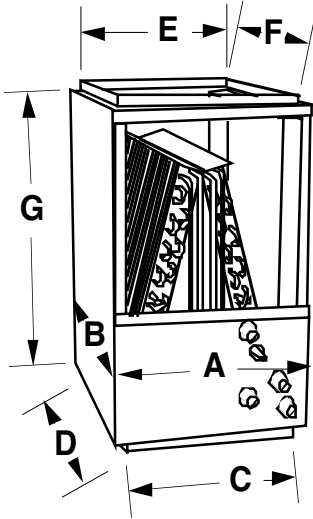

GENERAL SPECIFICATIONS

(Coil shown in vertical configuration with front access panel removed.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Right-hand refrigerant and plumbing connections.
- Three 3/4" MPT condensate drains. Dual drain in vertical or horizontal position.
- No field-modification required for multi-position applications.
- Factory pre-installed powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

ARMSTRONG MODULAR BLOWER	ASPEN COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
MB(V)08/12	BVR** 24	BDJ19	17-1/2	21-1/2	16	20	15-1/2	20	19
	BVR** 30	BDJ19	17-1/2	21-1/2	16	20	15-1/2	20	19
	BVR** 36	BDJ19	17-1/2	21-1/2	16	20	15-1/2	20	19
MB(V)14/16	BVR** 36	BDK23	22	21-1/2	20-1/2	20	20	20	23
	BVR** 42	BDK23	22	21-1/2	20-1/2	20	20	20	23
	BV1** 48	BDK23	22	21-1/2	20-1/2	20	20	20	23
	BV7** 60	BDK29	22	21-1/2	20-1/2	20	20	20	29
MB(V)20	BV5** 48	BDN29	22	24-1/2	20-1/2	23	20	23	29
	BV1** 48	BDN29	22	24-1/2	20-1/2	23	20	23	29
	BV1** 60	BDN29	22	24-1/2	20-1/2	23	20	23	29
	BV7** 60	BDN29	22	24-1/2	20-1/2	23	20	23	29