




ASPEN
MANUFACTURING

373 ATASCOCITA RD. • HUMBLE, TX • 77396
TEL (281) 441-6500 • FAX (281) 441-6510
<< www.aspenmfg.com >>

DIMENSIONS AND SPECIFICATIONS

Aspen BB Series Horizontal Coils with Ductboard Plenums

Designed to Fit Armstrong GHJ Horizontal/Upflow Furnaces

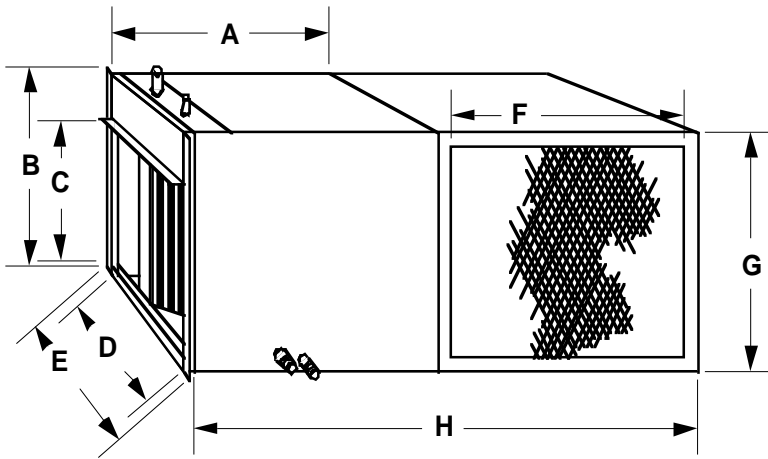

COIL SPECIFICATIONS

(Representative drawing only. Some models may vary in appearance.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Refrigerant lines exit from the top of the coil.
- Four 3/4" FPT galvanized condensate drains (two per side).
- Powder-painted galvanized steel drain pan.
- Inlet and outlet dimensions are identical (without end caps).
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Top access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

OPTIONAL PLENUM SPECIFICATIONS

- Slips over either end of coil.
- Rectangular shape offers maximum surface area for duct connections.
- Plenum sides and top constructed of foil-backed fiberglass ductboard or sheet metal.
- Plenum end and bottom constructed of galvanized steel.

ARMSTRONG FURNACE MODEL	COIL + PLENUM MODEL	END CAP MODEL	COIL OVERALL		COIL INLET (END CAPS INSTALLED)		COIL WIDTH	PLENUM		COIL+ PLEN SIZE	WT (LBS)
			A	B	C	D		F	G		
GHJ050D10 GHJ075D09	BBL 30+PLL 30	ARMS01	22-3/4	16-3/4	14-1/2	19-3/4	22	17-3/4	16-7/8	40	46
	BBL 31+PLL 31	ARMS01	22-3/4	16-3/4	14-1/2	19-3/4	22	17-3/4	16-7/8	40	46
	BBH 30+PLH 30	ARMS05	22-3/4	20-3/4	14-1/2	19-3/4	22	17-3/4	20-7/8	40	50
	BBH 31+PLH 31	ARMS05	22-3/4	20-3/4	14-1/2	19-3/4	22	17-3/4	20-7/8	40	50
GHJ050D14 GHJ075D14	BBH 36+PLH 36	ARMS02	22-3/4	20-3/4	17-1/2	19-3/4	22	17-3/4	20-7/8	40	50
	BBH 37+PLH 37	ARMS02	22-3/4	20-3/4	17-1/2	19-3/4	22	17-3/4	20-7/8	40	50
	BBL 48+PLL 48	ARMS06	22-3/4	18-3/4	17-1/2	19-3/4	22	17-3/4	18-7/8	40	56
	BBL 49+PLL 49	ARMS06	22-3/4	18-3/4	17-1/2	19-3/4	22	17-3/4	18-7/8	40	56
	BBH 48+PLH 48	ARMS07	22-3/4	22-3/4	17-1/2	19-3/4	22	17-3/4	22-7/8	40	57
	BBH 49+PLH 49	ARMS07	22-3/4	22-3/4	17-1/2	19-3/4	22	17-3/4	22-7/8	40	57
GHJ075D16 GHJ100D20 GHJ125D20	BBH 48+PLH 48	ARMS03	22-3/4	22-3/4	22	19-3/4	22	17-3/4	22-7/8	40	57
	BBH 49+PLH 49	ARMS03	22-3/4	22-3/4	22	19-3/4	22	17-3/4	22-7/8	40	57
	BBL 60+PLL 60	ARMS03	22-3/4	22-3/4	22	19-3/4	22	17-3/4	22-7/8	40	60
	BBL 61+PLL 61	ARMS03	22-3/4	22-3/4	22	19-3/4	22	17-3/4	22-7/8	40	60
	BBH 60+PLH 60	ARMS04	22-3/4	26-3/4	22	19-3/4	22	17-3/4	26-7/8	40	61
	BBH 61+PLH 61	ARMS04	22-3/4	26-3/4	22	19-3/4	22	17-3/4	26-7/8	40	61

BB +PL Spec-Armstrong GHJ 2. Effective 6/18/99. Supersedes all previous versions. Subject to change without notice.