


## DIMENSIONS AND SPECIFICATIONS

### Aspen Cased Upflow/Downflow Coils

Designed for Aire-Flo AF80 and AF90 Gas Furnaces

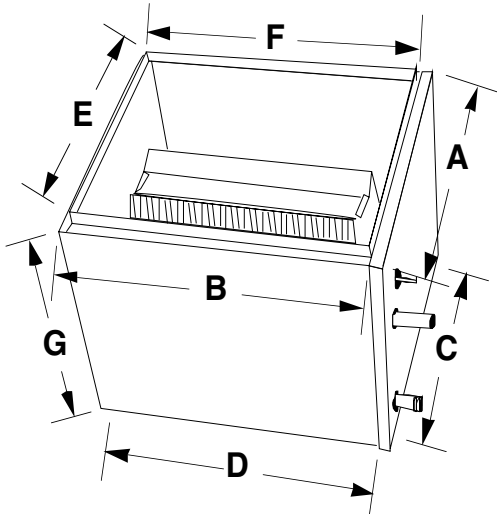

#### GENERAL SPECIFICATIONS

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Left-hand refrigerant and plumbing connections.
- One 3/4" MPT condensate drain.
- Powder-painted galvanized metal drain pan. Stainless available.
- Five-year warranty.
- Flowrate standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy guage embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

FURNACE MODEL	COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
AF80MPA050B3	BVR** 24	C6N12	14	21	11-3/4	19-1/8	11-1/4	18-3/4	12
AF90MPA075B3	BV1** 24	C6N18	14	21	11-3/4	19-1/8	11-1/4	18-3/4	18
	BVR** 30	C6N18	14	21	11-3/4	19-1/8	11-1/4	18-3/4	18
AF90MPA050*3	BVR** 36	C6N18	14	21	11-3/4	19-1/8	11-1/4	18-3/4	18
AF90MPA075*3	BV5** 36	C6N18	14	21	11-3/4	19-1/8	11-1/4	18-3/4	18
AF80MPA075B4	BVR** 42	C6P20	17	21	15-1/4	19-1/8	14-3/4	18-3/4	20
AF80MPA100B4	BVR** 48	C6P20	17	21	15-1/4	19-1/8	14-3/4	18-3/4	20
AF90MPA100*4	BV7** 60	C6P26	17	21	15-1/4	19-1/8	14-3/4	18-3/4	26
AF80MPA100B5	BV1** 60	C6Q26	20-1/2	21	18-3/4	19-1/8	18-1/4	18-3/4	26
AF80MPA125B5	BV7** 60	C6Q26	20-1/2	21	18-3/4	19-1/8	18-1/4	18-3/4	26
AF90MPA125*5	BV2** 60	C6R26	20-1/2	23	18-3/4	19-1/8	18-1/4	18-3/4	26