




## DIMENSIONS AND SPECIFICATIONS

### Aspen Cased Upflow Coils

For Amana GUIA Upflow/Horizontal Furnaces

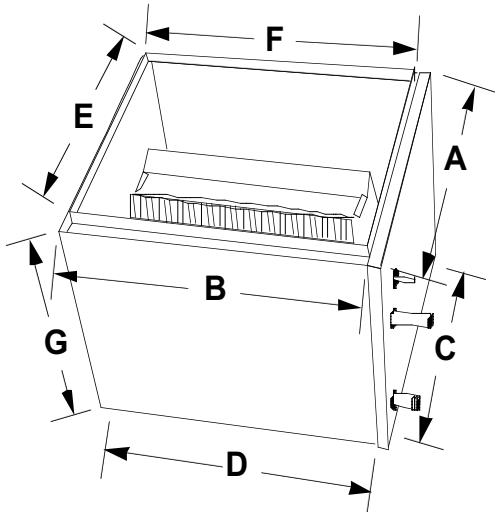

#### GENERAL SPECIFICATIONS

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Left-hand refrigerant and plumbing connections.
- One 3/4" MPT condensate drain.
- Powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Riffled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

AMANA FURNACE MODEL	ASPEN COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
GUI(A,B)045, 70 GCI(A,B)045, 70	BV1** 18	AEB16	16-1/2	21-7/8	15-1/4	20-3/8	15	20-3/8	16
	BV1** 24	AEB16	16-1/2	21-7/8	15-1/4	20-3/8	15	20-3/8	16
	BV1** 30	AEB16	16-1/2	21-7/8	15-1/4	20-3/8	15	20-3/8	16
	BVR** 36	AEB16	16-1/2	21-7/8	15-1/4	20-3/8	15	20-3/8	16
	BVR** 42	AEB24	16-1/2	21-7/8	15-1/4	20-3/8	15	20-3/8	24
	BV1** 48	AEB24	16-1/2	21-7/8	15-1/4	20-3/8	15	20-3/8	24
GUI(A,B)090 GCI(A,B)090	BVR** 36	AEA16	20-1/2	21-7/8	19-1/4	20-3/8	19	20-3/8	16
	BVR** 42	AEA24	20-1/2	21-7/8	19-1/4	20-3/8	19	20-3/8	24
	BV1** 48	AEA24	20-1/2	21-7/8	19-1/4	20-3/8	19	20-3/8	24
	BV1** 60	AEA24	20-1/2	21-7/8	19-1/4	20-3/8	19	20-3/8	24
	BV7** 60	AEA26	20-1/2	21-7/8	19-1/4	20-3/8	19	20-3/8	26
GUI(A,B)115, 140 GCI(A,B)115, 140	BVR** 42	AEC24	24-1/2	21-7/8	23-1/4	20-3/8	23	20-3/8	24
	BV1** 48	AEC24	24-1/2	21-7/8	23-1/4	20-3/8	23	20-3/8	24
	BV1** 60	AEC24	24-1/2	21-7/8	23-1/4	20-3/8	23	20-3/8	24
	BV7** 60	AEC26	24-1/2	21-7/8	23-1/4	20-3/8	23	20-3/8	26
	BV2** 60	AED26	24-1/2	23	23-1/4	20-3/8	23	21-1/2	26