


DIMENSIONS AND SPECIFICATIONS

Aspen Cased Upflow Coils

For Amana GULA Upflow Furnaces

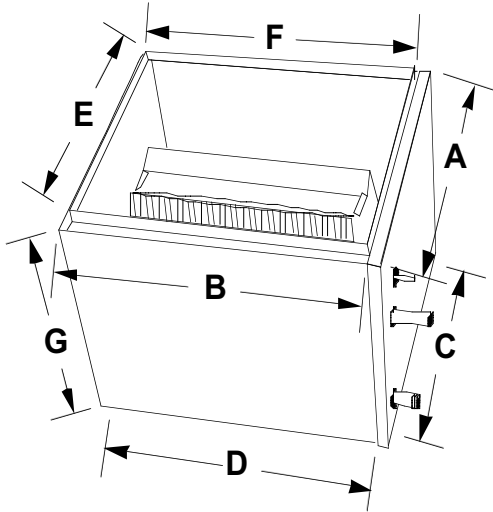

GENERAL SPECIFICATIONS

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Left-hand refrigerant and plumbing connections.
- One 3/4" MPT condensate drain.
- Powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Riffled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

AMANA FURNACE MODEL	ASPEN COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
GULA045_30 GULA070_30	BVR** 24	AEB12	16-1/2	21-7/8	15-1/4	20-3/8	15	20-3/8	12
	BV1** 24	AEB18	16-1/2	21-7/8	15-1/4	20-3/8	15	20-3/8	18
	BVR** 30	AEB18	16-1/2	21-7/8	15-1/4	20-3/8	15	20-3/8	18
	BV1** 30	AEB18	16-1/2	21-7/8	15-1/4	20-3/8	15	20-3/8	18
	BVR** 36	AEB18	16-1/2	21-7/8	15-1/4	20-3/8	15	20-3/8	18
	BV5** 36	AEB18	16-1/2	21-7/8	15-1/4	20-3/8	15	20-3/8	18
GULA070_40 GULA090_40	BVR** 36	AEA18	20-1/2	21-7/8	19-1/4	20-3/8	19	20-3/8	18
	BV5** 36	AEA18	20-1/2	21-7/8	19-1/4	20-3/8	19	20-3/8	18
	BVR** 42	AEA18	20-1/2	21-7/8	19-1/4	20-3/8	19	20-3/8	18
	BV5** 42	AEA24	20-1/2	21-7/8	19-1/4	20-3/8	19	20-3/8	24
	BVR** 48	AEA24	20-1/2	21-7/8	19-1/4	20-3/8	19	20-3/8	24
	BV1** 48	AEA24	20-1/2	21-7/8	19-1/4	20-3/8	19	20-3/8	24
GULA090_50 GULA115_50	BVR** 48	AEC20	24-1/2	21-7/8	23-1/4	20-3/8	23	20-3/8	20
	BV1** 48	AEC26	24-1/2	21-7/8	23-1/4	20-3/8	23	20-3/8	26
	BV5** 48	AEC26	24-1/2	21-7/8	23-1/4	20-3/8	23	20-3/8	26
	BV1** 60	AEC26	24-1/2	21-7/8	23-1/4	20-3/8	23	20-3/8	26
	BV2** 60	AED26	24-1/2	23	23-1/4	20-3/8	23	21-1/2	26
	BV7** 60	AEC26	24-1/2	21-7/8	23-1/4	20-3/8	23	20-3/8	26