


## DIMENSIONS AND SPECIFICATIONS

### Aspen Upflow/Downflow Uncased Coils

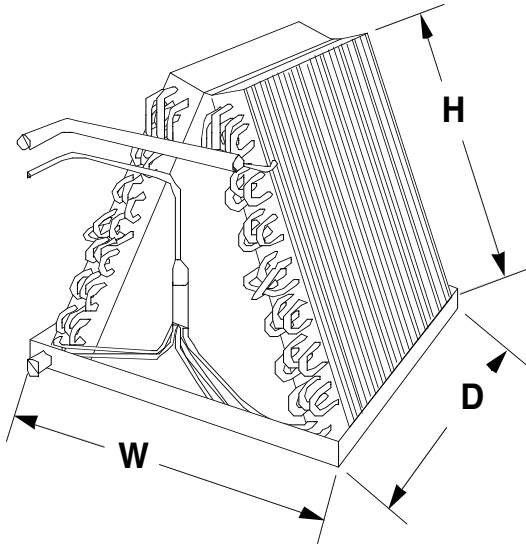

#### GENERAL SPECIFICATIONS

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Left-hand refrigerant and plumbing connections.
- One 3/4" MPT condensate drain.
- Powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrate standard. Factory or field-installable TXV available.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

COIL MODEL	BARE COIL HT (H)	DRAIN PAN DIMENSIONS (W / D)							
		13-1/2 X 19	14-3/4 X 19	15-3/4 X 19	16-3/4 X 19	18-1/2 X 19	19-1/4 X 19	20-1/4 X 19	21-1/4 X 19
BV1**24	12	Z10*	Z11	Z12	Z13				
BVR**24	10	Z10*	Z11	Z12	Z13				
BV1** 30	14	Z10*	Z11	Z12	Z13				
BVR** 30	12	Z10*	Z11	Z12	Z13				
BV5** 36	16				Z14*	Z15	Z16	Z17	Z18
BVR** 36	14				Z14*	Z15	Z16	Z17	Z18
BV5** 42	18				Z14*	Z15	Z16	Z17	Z18
BVR** 42	16				Z14*	Z15	Z16	Z17	Z18

\* For use with two row coils only.

COIL MODEL	BARE COIL HT (H)	DRAIN PAN DIMENSIONS (W / D)										
		22-3/4 X 19	23-1/2 X 19	24-1/2 X 19	25-3/4 X 19	26-1/4 X 19	22-3/4 X 21-3/4	23-1/2 X 21-3/4	24-1/2 X 21-3/4	25-3/4 X 21-3/4	26-1/4 X 21-3/4	21-1/4 X 21-3/4
BV1** 48	22	Z19	Z20	Z21	Z22	Z23						
BV5** 48	20	Z19	Z20	Z21	Z22	Z23						
BVR** 48	18	Z19	Z20	Z21	Z22	Z23						
BV1** 60	22	Z19	Z20	Z21	Z22	Z23						
BV2** 60	24						Z24	Z25	Z26	Z27	Z28	Z29
BV7** 60	24	Z19	Z20	Z21	Z22	Z23						