




373 ATASCOCITA RD. • HUMBLE, TX • 77098
 TEL (281) 441-8500 • FAX (281) 441-8510
 www.aspenmfg.com

PRELIMINARY DIMENSIONS AND SPECIFICATIONS

Aspen Uncased Upflow/Downflow Coils with Nylon Drain Pans

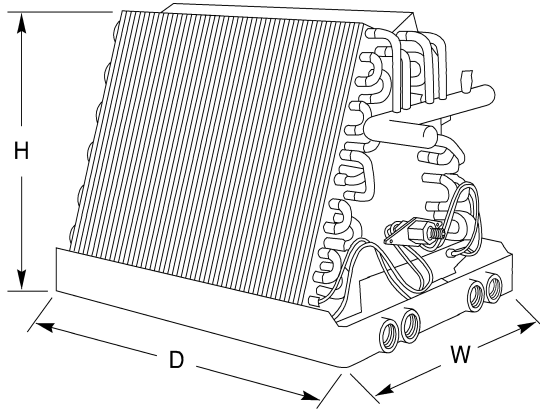

GENERAL SPECIFICATIONS

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Left-hand or right-hand refrigerant and plumbing connections.
- Four 3/4" FPT condensate drains (primary and secondary left or primary and secondary right).
- Glass-loaded nylon standard. Powder-painted metal or stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

COIL MODEL	BARE SLAB HEIGHT	13" PAN WIDTH: Z30	16" PAN WIDTH: Z31	19-1/2" PAN WIDTH: Z32	23" PAN WIDTH: Z33
BV1**24	12	Y	Y	Y	N
BVR**24	10	Y	Y	Y	N
BV1** 30	14	Y	Y	Y	N
BVR** 30	12	Y	Y	Y	N
BV5** 36	16	Y	Y	Y	N
BVR** 36	14	Y	Y	Y	N
BV5** 42	18	N	Y	Y	Y
BVR** 42	16	N	Y	Y	Y
BV1** 48	22	N	Y	Y	Y
BV5** 48	20	N	Y	Y	Y
BVR** 48	18	N	Y	Y	Y
BV1** 60	22	N	N	Y	Y
BV2** 60	24	N	N	N	N
BV7** 60	24	N	N	Y	Y

PAN SUFFIX	DRAIN PAN WIDTH	DRAIN PAN DEPTH
Z30	13	19-3/8
Z31	16	19-3/8
Z32*	19-1/2	19-3/8
Z33*	23	19-3/8

* Available in 2005.

BV Spec-L/C Nylon. Effective 11/1/04. Supercedes all previous versions. Subject to change without notice.