




DIMENSIONS AND SPECIFICATIONS

Aspen Cased Upflow Coils

Designed for Lennox G26 Upflow Furnaces

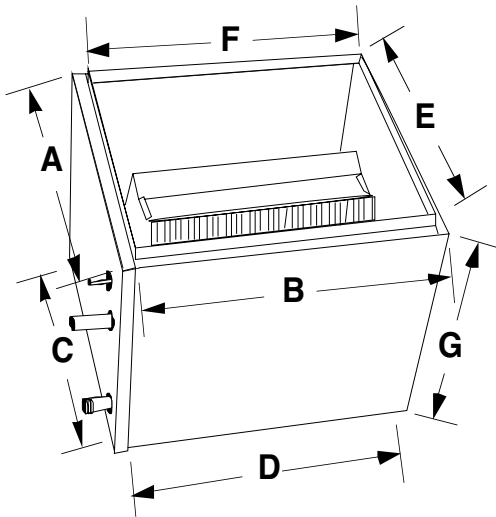

GENERAL SPECIFICATIONS

(Drawing is representative only. Actual models may vary.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Right-hand connections
- Schrader port for charge verification and TXV retrofit
- Two 3/4" NPT condensate drains.
- Mastic-coated galvanized metal drain pan.
- Five-year warranty.
- Metering device designed for either piston or TXV retrofit.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Every coil immersion-tested at 500 psi, then nitrogen pressurized and sealed.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

LENNOX FURNACE MODEL	ASPEN COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HT
			A	B	C	D	E	F	G
G26Q2-50, G26Q3-50, G26Q3-75	BV1** 36	ANM20	16-1/4	21	14-3/8	19-1/8	14-3/4	19-1/2	20
G26Q4/5-75, G26Q3/4-100, G26Q4/5-100	BV1** 48	ANN24	21-1/4	21	19-3/8	19-1/8	19-3/4	19-1/2	24
G26Q3/4-125, G264/5-125	BV2** 60	ANQ26	26-1/4	23	24-3/8	19-1/8	24-3/4	21-1/2	26