


## DIMENSIONS AND SPECIFICATIONS

### Aspen Cased Upflow Coils

Designed for York G8C Multi-Position and G9T Upflow Furnaces

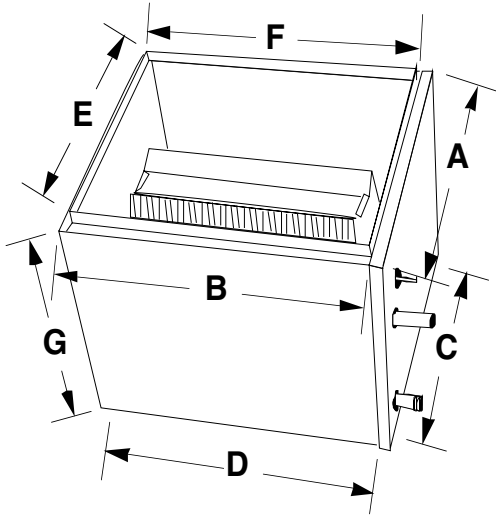

#### GENERAL SPECIFICATIONS

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Left-hand refrigerant and plumbing connections.
- One 3/4" MPT condensate drain.
- Powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

FURNACE MODEL	COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
G9T04008UPA13	BVR** 24	AYR12	14-1/2	21-3/4	13-1/2	20-1/4	13	20-1/4	12
G9T08012UPB13	BVR** 24	AYN12	17-1/2	21-3/4	16-1/2	20-1/4	16	20-1/4	12
G9T06010UPB13	BVR** 30	AYN18	17-1/2	21-3/4	16-1/2	20-1/4	16	20-1/4	18
G8C05012MUB11	BVR** 36	AYN18	17-1/2	21-3/4	16-1/2	20-1/4	16	20-1/4	18
G8C07512MUB11	BV5** 36	AYN18	17-1/2	21-3/4	16-1/2	20-1/4	16	20-1/4	18
G8C07516MUC11	BVR** 36	AYP20	21	21-3/4	20	20-1/4	19-1/2	20-1/4	20
G8C10016MUC11	BVR** 42	AYP20	21	21-3/4	20	20-1/4	19-1/2	20-1/4	20
G9T08016UPC13	BVR** 48	AYP20	21	21-3/4	20	20-1/4	19-1/2	20-1/4	20
G9T10014UPC13									
G9T10020UPC13									
G9T12020UPD13	BV1** 48	AYQ26	24-1/2	21-3/4	23-1/2	20-1/4	23	20-1/4	26
G9T14020UPD13	BV1** 60	AYQ26	24-1/2	21-3/4	23-1/2	20-1/4	23	20-1/4	26
G8C10020MUD11	BV7** 60	AYQ26	24-1/2	21-3/4	23-1/2	20-1/4	23	20-1/4	26
G8C12520MUD11									
G8C12520UHD11									