


DIMENSIONS AND SPECIFICATIONS

Aspen Cased Upflow Coils

Designed for York G8T Multi-Position Furnaces

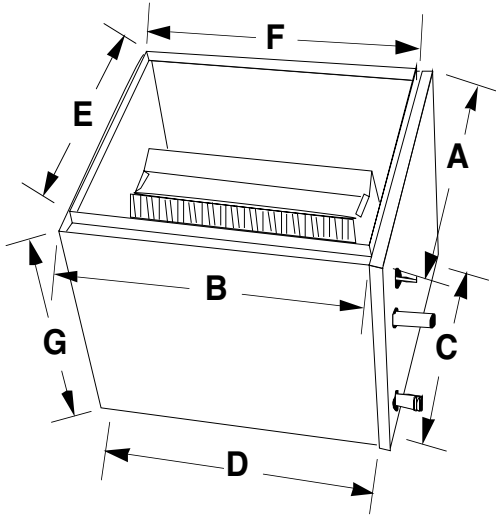

GENERAL SPECIFICATIONS

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Left-hand refrigerant and plumbing connections.
- One 3/4" MPT condensate drain.
- Powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

FURNACE MODEL	COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
G8T04012UHA11	BVR** 24	AYR12	14-1/2	21-3/4	13-1/2	20-1/4	13	20-1/4	12
G8T06012UHA11	BVR** 30	AYR12	14-1/2	21-3/4	13-1/2	20-1/4	13	20-1/4	12
G8T08012UHA11	BVR** 36	AYR18	14-1/2	21-3/4	13-1/2	20-1/4	13	20-1/4	18
	BV5** 36	AYR18	14-1/2	21-3/4	13-1/2	20-1/4	13	20-1/4	18
G8T08016UHB11	BVR** 36	AYN20	17-1/2	21-3/4	16-1/2	20-1/4	16	20-1/4	20
G8T10012UHB11	BV5** 36	AYN20	17-1/2	21-3/4	16-1/2	20-1/4	16	20-1/4	20
G8T10016UHB11	BVR** 42	AYN20	17-1/2	21-3/4	16-1/2	20-1/4	16	20-1/4	20
	BVR** 48	AYN20	17-1/2	21-3/4	16-1/2	20-1/4	16	20-1/4	20
G8T08020UHC11	BV1** 60	AYP26	21	21-3/4	20	20-1/4	19-1/2	20-1/4	26
G8T10020UHC11	BV7** 60	AYP26	21	21-3/4	20	20-1/4	19-1/2	20-1/4	26
G8T11516UHC11									
G8T11520UHC11									
G8T13020UHD11	BV1** 60	AYQ26	24-1/2	21-3/4	23-1/2	20-1/4	23	20-1/4	26
	BV7** 60	AYQ26	24-1/2	21-3/4	23-1/2	20-1/4	23	20-1/4	26