


DIMENSIONS AND SPECIFICATIONS

Aspen Cased Upflow Coils

Designed for York GY8S-UH and LY8S-UH Upflow/Horizontal Furnaces

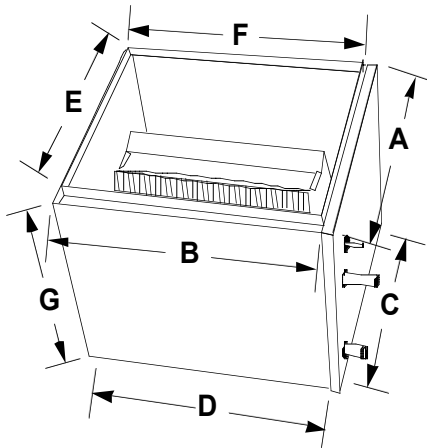

GENERAL SPECIFICATIONS

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Left-hand refrigerant and plumbing connections.
- Two 3/4" FPT condensate drains.
- Nylon or powder-painted galvanized steel drain pans standard. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed with Schrader for pre-installation pressure testing.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

FURNACE MODEL	COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
GY8S*A* LY8S*A*	BVR** 24	AYR14	14-1/2	21-3/4	13-1/2	20-1/4	13	20-1/4	14
	BV1** 24	AYR14	14-1/2	21-3/4	13-1/2	20-1/4	13	20-1/4	14
	BVR** 30	AYR14	14-1/2	21-3/4	13-1/2	20-1/4	13	20-1/4	14
	BV1** 30	AYR20	14-1/2	21-3/4	13-1/2	20-1/4	13	20-1/4	20
	BVR** 36	AYR20	14-1/2	21-3/4	13-1/2	20-1/4	13	20-1/4	20
	BV5** 36	AYR20	14-1/2	21-3/4	13-1/2	20-1/4	13	20-1/4	20
	BV1** 48	AYR26	14-1/2	21-3/4	13-1/2	20-1/4	13	20-1/4	26
	BV5** 48	AYR26	14-1/2	21-3/4	13-1/2	20-1/4	13	20-1/4	26
GY8S*B* LY8S*B*	BVR** 24	AYN14	17-1/2	21-3/4	16-1/2	20-1/4	16	20-1/4	14
	BV1** 24	AYN14	17-1/2	21-3/4	16-1/2	20-1/4	16	20-1/4	14
	BVR** 30	AYN14	17-1/2	21-3/4	16-1/2	20-1/4	16	20-1/4	14
	BVR** 36	AYN20	17-1/2	21-3/4	16-1/2	20-1/4	16	20-1/4	20
	BV5** 36	AYN20	17-1/2	21-3/4	16-1/2	20-1/4	16	20-1/4	20
	BVR** 42	AYN20	17-1/2	21-3/4	16-1/2	20-1/4	16	20-1/4	20
	BVR** 48	AYN20	17-1/2	21-3/4	16-1/2	20-1/4	16	20-1/4	20
	BV1** 48	AYN26	17-1/2	21-3/4	16-1/2	20-1/4	16	20-1/4	26
	BV5** 48	AYN26	17-1/2	21-3/4	16-1/2	20-1/4	16	20-1/4	26
BV2** 60	AWF26	17-1/2	23	16-1/2	20-1/4	16	21-1/2	26	
GY8S*C* LY8S*C*	BVR** 30	AYP14	21	21-3/4	20	20-1/4	19-1/2	20-1/4	14
	BVR** 36	AYP20	21	21-3/4	20	20-1/4	19-1/2	20-1/4	20
	BV5** 36	AYP20	21	21-3/4	20	20-1/4	19-1/2	20-1/4	20
	BVR** 42	AYP20	21	21-3/4	20	20-1/4	19-1/2	20-1/4	20
	BVR** 48	AYP20	21	21-3/4	20	20-1/4	19-1/2	20-1/4	20
	BV1** 48	AYP26	21	21-3/4	20	20-1/4	19-1/2	20-1/4	26
	BV5** 48	AYP26	21	21-3/4	20	20-1/4	19-1/2	20-1/4	26
	BV1** 60	AYP26	21	21-3/4	20	20-1/4	19-1/2	20-1/4	26
	BV2** 60	AWD26	21	23	20	20-1/4	19-1/2	21-1/2	26
GY8S*D* LY8S*D*	BVR** 42	AYQ20	24-1/2	21-3/4	23-1/2	20-1/4	23	20-1/4	20
	BVR** 48	AYQ20	24-1/2	21-3/4	23-1/2	20-1/4	23	20-1/4	20
	BV1** 48	AYQ26	24-1/2	21-3/4	23-1/2	20-1/4	23	20-1/4	26
	BV1** 60	AYQ26	24-1/2	21-3/4	23-1/2	20-1/4	23	20-1/4	26
	BV2** 60	AWE26	24-1/2	23	23-1/2	20-1/4	23	21-1/2	26
	BV7** 60	AYQ26	24-1/2	21-3/4	23-1/2	20-1/4	23	20-1/4	26

BV Spec-York A GY8S. Effective 1/26/05. Supersedes all previous versions. Subject to change without notice.