


DIMENSIONS AND SPECIFICATIONS

Aspen VersaCoil Cased Multi-Position Coils

Designed to Fit Carrier Upflow and Downflow/Horizontal Furnaces

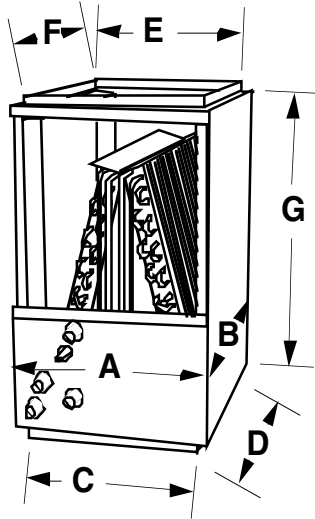

GENERAL SPECIFICATIONS

(Coil shown in vertical configuration with front access panel removed.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS.
- Left-hand refrigerant and plumbing connections.
- Four 3/4" FPT condensate drains. Dual drain in vertical or horizontal position.
- No field-modification required for multi-position applications.
- Factory pre-installed powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

CARRIER FURNACE WIDTH	ASPEN COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
14- 3/16	BVR** 24	BCT17	14-3/16	20-7/16	12-13/16	19-1/4	12-5/16	18-3/4	17
	BV1** 24	BCT17	14-3/16	20-7/16	12-13/16	19-1/4	12-5/16	18-3/4	17
	BVR** 30	BCT17	14-3/16	20-7/16	12-13/16	19-1/4	12-5/16	18-3/4	17
	BV1** 36	BCT23	14-3/16	20-7/16	12-13/16	19-1/4	12-5/16	18-3/4	23
17- 1/2	BVR** 30	BCV17	17-1/2	20-7/16	16-1/8	19-1/4	15-5/8	18-3/4	17
	BV1** 36	BCV23	17-1/2	20-7/16	16-1/8	19-1/4	15-5/8	18-3/4	23
	BV5** 42	BCV23	17-1/2	20-7/16	16-1/8	19-1/4	15-5/8	18-3/4	23
	BVR** 48	BCV23	17-1/2	20-7/16	16-1/8	19-1/4	15-5/8	18-3/4	23
21	BV1** 36	BCW23	21	20-7/16	19-5/8	19-1/4	19-1/8	18-3/4	23
	BV5** 42	BCW23	21	20-7/16	19-5/8	19-1/4	19-1/8	18-3/4	23
	BVR** 48	BCW23	21	20-7/16	19-5/8	19-1/4	19-1/8	18-3/4	23
24- 1/2	BV1** 60	BCX27	24-1/2	20-7/16	23-1/8	19-1/4	22-5/8	18-3/4	27