




DIMENSIONS AND SPECIFICATIONS

Aspen BB Series Horizontal Coils with Ductboard Plenums

Designed to Fit Coleman PCUH Furnaces

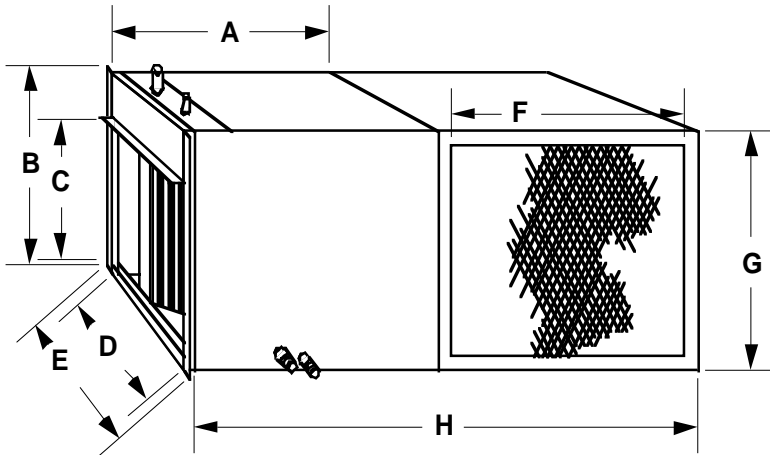

COIL SPECIFICATIONS

(Representative drawing only. Some models may vary in appearance.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Refrigerant lines exit from the top of the coil.
- Four 3/4" FPT galvanized condensate drains (two per side).
- Powder-painted galvanized steel drain pan.
- Inlet and outlet dimensions are identical (without end caps).
- Five-year warranty.
- Flowrate standard. Factory or field-installable TXV available.
- Top access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Rified copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

OPTIONAL PLENUM SPECIFICATIONS

- Slips over either end of coil.
- Rectangular shape offers maximum surface area for duct connections.
- Plenum sides and top constructed of foil-backed fiberglass ductboard or sheet metal.
- Plenum end and bottom constructed of galvanized steel.

COLEMAN FURNACE MODEL	COIL + PLENUM MODEL	END CAP MODEL	COIL OVERALL		COIL INLET (END CAPS INSTALLED)		COIL WIDTH	PLENUM		COIL + PLENUM SIZE	WT (LBS)
			A	B	C	D		F	G		
PCUHA*	BBL 30+PLL 30	COLE09	22-3/4	16-3/4	14-1/2	20-1/4	22	17-3/4	16-7/8	40	46
	BBL 31+PLL 31	COLE09	22-3/4	16-3/4	14-1/2	20-1/4	22	17-3/4	16-7/8	40	46
	BBH 36+PLH 36	COLE10	22-3/4	20-3/4	14-1/2	20-1/4	22	17-3/4	20-7/8	40	51
	BBH 37+PLH 37	COLE10	22-3/4	20-3/4	14-1/2	20-1/4	22	17-3/4	20-7/8	40	51
	BBL 36+PLL 36	COLE09	22-3/4	16-3/4	14-1/2	20-1/4	22	17-3/4	16-7/8	40	50
	BBL 37+PLL 37	COLE09	22-3/4	16-3/4	14-1/2	20-1/4	22	17-3/4	16-7/8	40	50
PCUHB*	BBH 48+PLH 48	COLE12	22-3/4	22-3/4	17-1/2	20-1/4	22	17-3/4	22-7/8	40	56
	BBH 49+PLH 49	COLE12	22-3/4	22-3/4	17-1/2	20-1/4	22	17-3/4	22-7/8	40	56
	BBL 48+PLL 48	COLE11	22-3/4	18-3/4	17-1/2	20-1/4	22	17-3/4	18-7/8	40	56
	BBL 49+PLL 49	COLE11	22-3/4	18-3/4	17-1/2	20-1/4	22	17-3/4	18-7/8	40	56
PCUHC*	BBH 60+PLH 60	COLE15	22-3/4	26-3/4	21	20-1/4	22	17-3/4	26-7/8	40	61
	BBH 61+PLH 61	COLE15	22-3/4	26-3/4	21	20-1/4	22	17-3/4	26-7/8	40	61
	BBL 60+PLL 60	COLE13	22-3/4	22-3/4	21	20-1/4	22	17-3/4	22-7/8	40	60
	BBL 61+PLL 61	COLE13	22-3/4	22-3/4	21	20-1/4	22	17-3/4	22-7/8	40	60
PCUHD*	BBH 60+PLH 60	COLE14	22-3/4	26-3/4	24-1/2	20-1/4	22	17-3/4	26-7/8	40	61
	BBH 61+PLH 61	COLE14	22-3/4	26-3/4	24-1/2	20-1/4	22	17-3/4	26-7/8	40	61

BB +PL Spec-Coleman PCUH 2. Effective 3/21/00. Supercedes all previous versions. Subject to change without notice.