


## DIMENSIONS AND SPECIFICATIONS

### Aspen VersaCoil Cased Multi-Position Coils

Designed to Fit Ducane CMPA Multipoise Furnaces

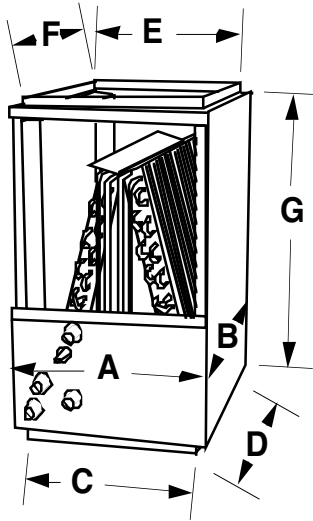

#### GENERAL SPECIFICATIONS

(Coil shown in vertical configuration with front access panel removed.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS.
- Left-hand refrigerant and plumbing connections.
- Three 3/4" MPT condensate drains. Dual drain in vertical or horizontal position.
- No field-modification required for multi-position applications.
- Factory pre-installed powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrate standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

DUCANE FURNACE MODEL	ASPEN COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
CMPA050U3, 075U3	BVR** 24	B6D17	14-1/2	21	11-3/4	19	11-3/4	19	17
	BVR** 30	B6D17	14-1/2	21	11-3/4	19	11-3/4	19	17
	BVR** 36	B6D21	14-1/2	21	11-3/4	19	11-3/4	19	21
	BVR** 42	B6D21	14-1/2	21	11-3/4	19	11-3/4	19	21
CMPA100U4	BVR** 48	B6E27	17	21	15-1/4	19	15-1/4	19	27
	BV1** 48	B6E27	17	21	15-1/4	19	15-1/4	19	27
CMPA125U5	BV1** 60	B6F27	20-1/2	21	18-3/4	19	18-3/4	19	27