




DIMENSIONS AND SPECIFICATIONS

Aspen BB Series Horizontal Coils with Ductboard Plenums

Designed to Fit Lennox G24M, G25M, 80MGF, and 80UHG Furnaces

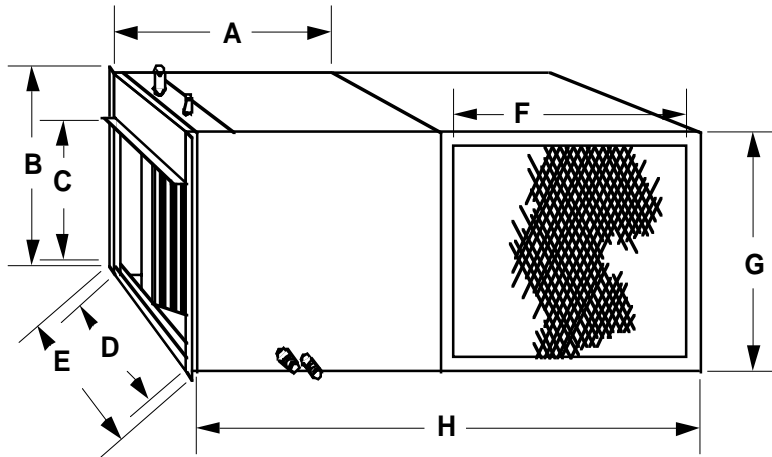

COIL SPECIFICATIONS

(Representative drawing only. Some models may vary in appearance.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Refrigerant lines exit from the top of the coil.
- Four 3/4" FPT galvanized condensate drains (two per side).
- Powder-painted galvanized steel drain pan.
- Inlet and outlet dimensions are identical (without end caps).
- Five-year warranty.
- Flowrate standard. Factory or field-installable TXV available.
- Top access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

OPTIONAL PLENUM SPECIFICATIONS

- Slips over either end of coil.
- Rectangular shape offers maximum surface area for duct connections.
- Plenum sides and top constructed of foil-backed fiberglass ductboard or sheet metal.
- Plenum end and bottom constructed of galvanized steel.

LENNOX FURNACE MODEL	COIL + PLENUM MODEL	END CAP MODEL	COIL OVERALL		COIL INLET (END CAPS INSTALLED)		COIL WIDTH	PLENUM		COIL + PLENUM SIZE	WT (LBS)
			A	B	C	D		F	G		
G24M, G25M, 80MGF, 80UHG -2-45, 2-60, 2-75, 3-60, 3-75, 4-75	BBH 24+PLH 24	LENN01	22-3/4	20-3/4	17	19-3/4	22	17-3/4	20-7/8	40	49
	BBH 30+PLH 30	LENN01	22-3/4	20-3/4	17	19-3/4	22	17-3/4	20-7/8	40	50
	BBH 31+PLH 31	LENN01	22-3/4	20-3/4	17	19-3/4	22	17-3/4	20-7/8	40	50
	BBH 36+PLH 36	LENN01	22-3/4	20-3/4	17	19-3/4	22	17-3/4	20-7/8	40	51
	BBH 37+PLH 37	LENN01	22-3/4	20-3/4	17	19-3/4	22	17-3/4	20-7/8	40	51
	BBH 48+PLH 48	LENN03	22-3/4	22-3/4	17	19-3/4	22	17-3/4	22-7/8	40	60
	BBH 49+PLH 49	LENN03	22-3/4	22-3/4	17	19-3/4	22	17-3/4	22-7/8	40	61
	BBL 48+PLL 48	LENN02	22-3/4	18-3/4	17	19-3/4	22	17-3/4	18-7/8	40	51
	BBL 49+PLL 49	LENN02	22-3/4	18-3/4	17	19-3/4	22	17-3/4	18-7/8	40	51
G24M, G25M, 80MGF, 80UHG -3/4-100, 3/4-120, -4/5-100, -4/5-120	BBH 48+PLH 48	LENN04	22-3/4	22-3/4	20-1/2	19-3/4	22	17-3/4	22-7/8	40	60
	BBH 49+PLH 49	LENN04	22-3/4	22-3/4	20-1/2	19-3/4	22	17-3/4	22-7/8	40	61
	BBH 60+PLH 60	LENN05	22-3/4	26-3/4	20-1/2	19-3/4	22	17-3/4	26-7/8	40	61
	BBH 61+PLH 61	LENN05	22-3/4	26-3/4	20-1/2	19-3/4	22	17-3/4	26-7/8	40	62
	BBH 63+PLH 63	LENN04	22-3/4	22-3/4	20-1/2	19-3/4	22	17-3/4	22-7/8	40	51
	BBL 60+PLL 60	LENN04	22-3/4	22-3/4	20-1/2	19-3/4	22	17-3/4	22-7/8	40	60
	BBL 61+PLL 61	LENN04	22-3/4	22-3/4	20-1/2	19-3/4	22	17-3/4	22-7/8	40	61

BB+PL Spec-Lennox 80UHG 2. Effective 2/10/00. Supercedes all previous versions. Subject to change without notice.