


DIMENSIONS AND SPECIFICATIONS

Aspen VersaCoil Cased Multi-Position Coils

Designed for Lennox G40, G50, and G60UH Up-Flow/Horizontal and G40DF Down-Flow Furnaces

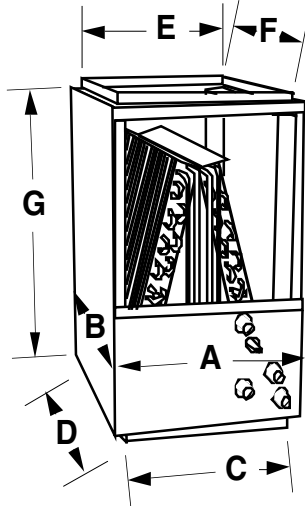

GENERAL SPECIFICATIONS

(Coil shown in vertical configuration with front access panel removed.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS.
- Right-hand refrigerant and plumbing connections.
- Four 3/4" FPT condensate drains. Dual drain in vertical or horizontal position.
- No field-modification required for multi-position applications (upflow, downflow, horizontal left or horizontal right).
- Factory pre-installed powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

LENNOX FURNACE MODEL	ASPEN COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
G40/50/60UH-24A G40/50/60UH-36A G40DF-24A G40DF-36A	BV1** 24	BPA19	14-5/8	21-1/4	13-5/8	19-3/4	13-1/8	19-1/4	19
	BVR** 24	BPA15	14-5/8	21-1/4	13-5/8	19-3/4	13-1/8	19-1/4	15
	BV1** 30	BPA19	14-5/8	21-1/4	13-5/8	19-3/4	13-1/8	19-1/4	19
	BVR** 30	BPA19	14-5/8	21-1/4	13-5/8	19-3/4	13-1/8	19-1/4	19
	BV1** 36	BPA23	14-5/8	21-1/4	13-5/8	19-3/4	13-1/8	19-1/4	23
	BV5** 36	BPA23	14-5/8	21-1/4	13-5/8	19-3/4	13-1/8	19-1/4	23
	BVR** 36	BPA19	14-5/8	21-1/4	13-5/8	19-3/4	13-1/8	19-1/4	19
	BV1** 48	BPA29	14-5/8	21-1/4	13-5/8	19-3/4	13-1/8	19-1/4	29
G40/50/60UH-36B G40/50/60UH-48B G40DF-36B	BV1** 30	BPB19	17-5/8	21-1/4	16-5/8	19-3/4	16-1/8	19-1/4	19
	BVR** 30	BPB19	17-5/8	21-1/4	16-5/8	19-3/4	16-1/8	19-1/4	19
	BV1** 36	BPB23	17-5/8	21-1/4	16-5/8	19-3/4	16-1/8	19-1/4	23
	BV5** 36	BPB23	17-5/8	21-1/4	16-5/8	19-3/4	16-1/8	19-1/4	23
	BVR** 36	BPB19	17-5/8	21-1/4	16-5/8	19-3/4	16-1/8	19-1/4	19
	BV1** 42	BPB29	17-5/8	21-1/4	16-5/8	19-3/4	16-1/8	19-1/4	29
	BV5** 42	BPB23	17-5/8	21-1/4	16-5/8	19-3/4	16-1/8	19-1/4	23
	BVR** 42	BPB23	17-5/8	21-1/4	16-5/8	19-3/4	16-1/8	19-1/4	23
	BV1** 48	BPB29	17-5/8	21-1/4	16-5/8	19-3/4	16-1/8	19-1/4	29
	BV5** 48	BPB29	17-5/8	21-1/4	16-5/8	19-3/4	16-1/8	19-1/4	29
	BVR** 48	BPB23	17-5/8	21-1/4	16-5/8	19-3/4	16-1/8	19-1/4	23
	BV2** 60	BPG29	17-5/8	23	16-5/8	19-3/4	16-1/8	19-1/4	29
	BV7** 60	BPB29	17-5/8	21-1/4	16-5/8	19-3/4	16-1/8	19-1/4	29
G40/50/60UH-48C G40/50/60UH-60C G40DF-48C	BV1** 42	BPC29	21-1/8	21-1/4	20-1/8	19-3/4	19-5/8	19-1/4	29
	BV5** 42	BPC23	21-1/8	21-1/4	20-1/8	19-3/4	19-5/8	19-1/4	23
	BVR** 42	BPC23	21-1/8	21-1/4	20-1/8	19-3/4	19-5/8	19-1/4	23
	BV1** 48	BPC29	21-1/8	21-1/4	20-1/8	19-3/4	19-5/8	19-1/4	29
	BV5** 48	BPC29	21-1/8	21-1/4	20-1/8	19-3/4	19-5/8	19-1/4	29
	BVR** 48	BPC23	21-1/8	21-1/4	20-1/8	19-3/4	19-5/8	19-1/4	23
	BV1** 60	BPC29	21-1/8	21-1/4	20-1/8	19-3/4	19-5/8	19-1/4	29
	BV2** 60	BPE29	21-1/8	23	20-1/8	19-3/4	19-5/8	19-1/4	29
	BV7** 60	BPC29	21-1/8	21-1/4	20-1/8	19-3/4	19-5/8	19-1/4	29
	BV8** 60	BPC30	21-1/8	21-1/4	20-1/8	19-3/4	19-5/8	19-1/4	30
G40/50/60UH-60D G40DF-60D	BV1** 60	BPD29	24-5/8	21-1/4	23-5/8	19-3/4	23-1/8	19-1/4	29
	BV2** 60	BPF29	24-5/8	23	23-5/8	19-3/4	23-1/8	19-1/4	29
	BV7** 60	BPD29	24-5/8	21-1/4	23-5/8	19-3/4	23-1/8	19-1/4	29