


DIMENSIONS AND SPECIFICATIONS

Aspen VersaCoil Cased Multi-Position Chilled Water Coils

Designed for Lennox G40, G50, and G60UH Upflow/Horizontal and G40DF Downflow Furnaces

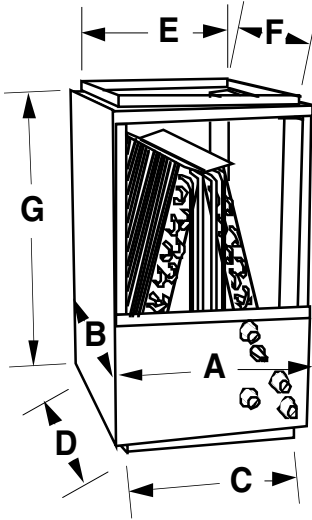

GENERAL SPECIFICATIONS

(Coil shown in vertical configuration with front access panel removed.)

- Standard chilled water connections: inlet - 7/8" ODS, outlet - 7/8" ODS.
- Right-hand refrigerant and plumbing connections.
- Four 3/4" FPT condensate drains. Dual drain in vertical or horizontal position.
- No field-modification required for multi-position applications (upflow, downflow, horizontal left or horizontal right).
- Factory pre-installed powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Smooth copper tubing, enhanced aluminum fins.
- ETL listed.

FURNACE MODEL	COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
G40/50/60UH-24A,	BW1** 24	BPA19	14-5/8	21-1/4	13-5/8	19-3/4	13-1/8	19-1/4	19
G40/50/60UH-36A, G40DF-24A, G40DF-36A	BW5** 36	BPA23	14-5/8	21-1/4	13-5/8	19-3/4	13-1/8	19-1/4	23
G40/50/60UH-36B, G40/50/60UH-48B, G40DF-36B	BW1** 48	BPB29	17-5/8	21-1/4	16-5/8	19-3/4	16-1/8	19-1/4	29
G40/50/60UH-48C, G40/50/60UH-60C, G40DF-48C	BW2** 60	BPE29	21-1/8	23	20-1/8	19-3/4	19-5/8	19-1/4	29
G40/50/60UH-60D, G40DF-60D	BW2** 60	BPF29	24-5/8	23	23-5/8	19-3/4	23-1/8	19-1/4	29