




ASPEN
MANUFACTURING

373 ATASCOCITA RD. • HUMBLE, TX • 77396
TEL (281) 441-6500 • FAX (281) 441-6510
<< www.aspenmfg.com >>

DIMENSIONS AND SPECIFICATIONS

Aspen BB Series Horizontal Coils with Ductboard Plenums

Designed to Fit Lennox GHR26Q Horizontal Furnace

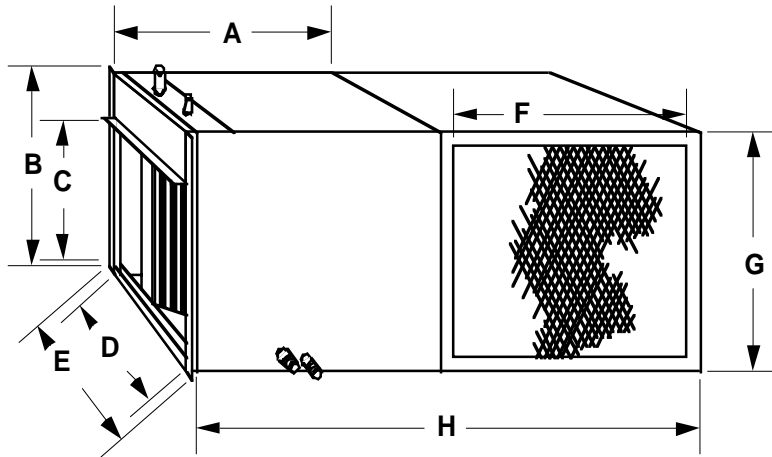

COIL SPECIFICATIONS

(Representative drawing only. Some models may vary in appearance.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Refrigerant lines exit from the top of the coil.
- Four 3/4" FPT galvanized condensate drains (two per side).
- Powder-painted galvanized steel drain pan.
- Binlet and outlet dimensions are identical (without end caps).
- Five-year warranty.
- Flowrate standard. Factory or field-installable TXV available.
- Top access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

OPTIONAL PLENUM SPECIFICATIONS

- Slips over either end of coil.
- Rectangular shape offers maximum surface area for duct connections.
- Plenum sides and top constructed of foil-backed fiberglass ductboard or sheet metal.
- Plenum end and bottom constructed of galvanized steel.

LENNOX FURNACE MODEL	COIL + PLENUM MODEL	END CAP MODEL	COIL OVERALL		COIL INLET (END CAPS INSTALLED)		COIL WIDTH	PLENUM		COIL + PLEN SIZE	WT (LBS)
			A	B	C	D		F	G		
GHR26Q2/3-50 GHR26Q3-75	BBL 24+PLL 24	LENN06	22-3/4	16-3/4	16-1/4	17-5/8	22	17-3/4	16-7/8	40	49
	BBL 30+PLL 30	LENN06	22-3/4	16-3/4	16-1/4	17-5/8	22	17-3/4	16-7/8	40	50
	BBH 36+PLH 36	LENN07	22-3/4	20-3/4	16-1/4	17-5/8	22	17-3/4	20-7/8	40	51
	BBH 37+PLH 37	LENN07	22-3/4	20-3/4	16-1/4	17-5/8	22	17-3/4	20-7/8	40	51
	BBL 36+PLL 36	LENN06	22-3/4	16-3/4	16-1/4	17-5/8	22	17-3/4	16-7/8	40	51
	BBL 37+PLL 37	LENN06	22-3/4	16-3/4	16-1/4	17-5/8	22	17-3/4	16-7/8	40	51
GHR26Q3/4-100 GHR26Q4/5-100 GHR26Q4/5-120	BBH 48+PLH 48	LENN08	22-3/4	22-3/4	21-1/4	17-5/8	22	17-3/4	22-7/8	40	60
	BBH 60+PLH 60	LENN09	22-3/4	26-3/4	21-1/4	17-5/8	22	17-3/4	26-7/8	40	61
	BBH 61+PLH 61	LENN09	22-3/4	26-3/4	21-1/4	17-5/8	22	17-3/4	26-7/8	40	61
	BBL 60+PLL 60	LENN08	22-3/4	22-3/4	21-1/4	17-5/8	22	17-3/4	22-7/8	40	60
	BBL 61+PLL 61	LENN08	22-3/4	22-3/4	21-1/4	17-5/8	22	17-3/4	22-7/8	40	60

BB+PL Spec-Lennox GHR26Q 2. Effective 8/19/99. Supersedes all previous versions. Subject to change without notice.