


DIMENSIONS AND SPECIFICATIONS Aspen BB Series Horizontal Coils with Ductboard Plenums

Designed to Fit Quatro MBA Furnaces

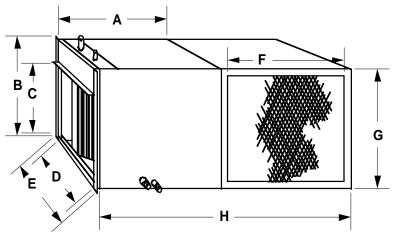

COIL SPECIFICATIONS

(Representative drawing only. Some models may vary in appearance.)

- Standard refrigerant connections: liquid line 3/8" ODS, suction line 7/8" ODS
- J/8" ODS, suction line 7/8" ODS
 Two 3/4" FPT condensate drains.
- I wo 3/4" FPT condensate drains.
- Inlet and outlet dimensions are identical (without end caps).
- Powder-painted metal drain pan.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.
- PLENUM SPECIFICATIONS
- Slips over either end of coil.
- Triangular shape optimizes air distribution.
- Plenum sides and top constructed of foil-backed fiberglass ductboard.
- Plenum end and bottom constructed of galvanized steel.

COIL + PLENUM	END CAP	COIL OVERALL		COIL INLET (END CAPS INSTALLED)		COIL WIDTH	PLENUM		COIL + PLEN SIZE	wт
MODEL	MODEL	Α	В	С	D	E	F	G	Н	(LBS)
BBL 30+PLL 30	QUAT01	22-3/4	16-1/2	14-1/2	19-1/4	22	17-3/4	16-5/8	40	46
BBH 36+PLH 36	QUAT02	22-3/4	20-1/2	14-1/2	19-1/4	22	17-3/4	20-5/8	40	51
BBL 36+PLL 36	QUAT01	22-3/4	16-1/2	14-1/2	19-1/4	22	17-3/4	16-5/8	40	50
BBH 48+PLH 48	QUAT04	22-3/4	22-1/2	17-1/2	19-1/4	22	17-3/4	22-5/8	40	56
BBL 48+PLL 48	QUAT03	22-3/4	18-1/2	17-1/2	19-1/4	22	17-3/4	18-5/8	40	56
BBH 60+PLH 60	QUAT06	22-3/4	26-1/2	20-1/2	19-1/4	22	17-3/4	26-5/8	40	61
BBL 60+PLL 60	QUAT05	22-3/4	22-1/2	20-1/2	19-1/4	22	17-3/4	22-5/8	40	60