


# DIMENSIONS AND SPECIFICATIONS

## Aspen BB Series Horizontal Coils with Ductboard Plenums

Designed to Fit Tempstar Furnaces

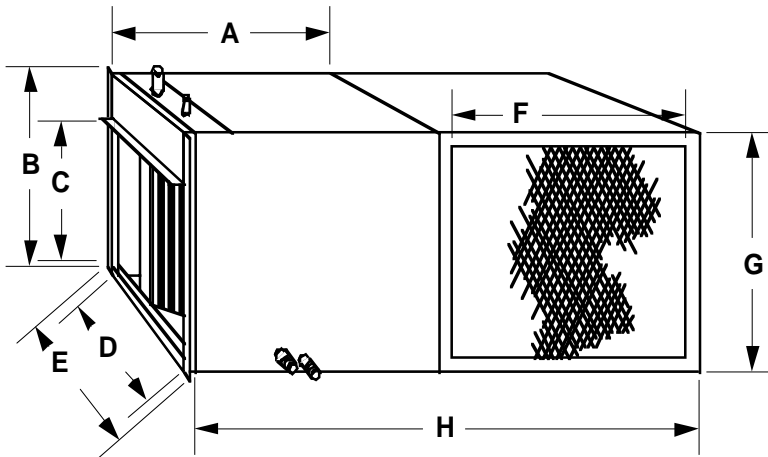

### COIL SPECIFICATIONS

(Representative drawing only. Some models may vary in appearance.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Refrigerant lines exit from the top of the coil.
- Four 3/4" FPT galvanized condensate drains (two per side).
- Powder-painted galvanized steel drain pan.
- Inlet and outlet dimensions are identical (without end caps).
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Top access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

### OPTIONAL PLENUM SPECIFICATIONS

- Slips over either end of coil.
- Rectangular shape offers maximum surface area for duct connections.
- Plenum sides and top constructed of foil-backed fiberglass ductboard or sheet metal.
- Plenum end and bottom constructed of galvanized steel.

TEMPSTAR FURNACE WIDTH	COIL + PLENUM MODEL	END CAP MODEL	COIL OVERALL		COIL INLET (END CAPS INSTALLED)		COIL WIDTH	PLENUM		COIL + PLENUM SIZE	WT (LBS)
			A	B	C	D		F	G		
15-1/2	BBL 30+PLL 30	ICPR01	22-3/4	16-3/4	15-1/2	18-3/4	22	17-3/4	16-7/8	40	46
	BBL 36+PLL 36	ICPR01	22-3/4	16-3/4	15-1/2	18-3/4	22	17-3/4	16-7/8	40	50
	BBL 37+PLL 37	ICPR01	22-3/4	16-3/4	15-1/2	18-3/4	22	17-3/4	16-7/8	41	55
	BBH 36+PLH 36	ICPR02	22-3/4	20-3/4	15-1/2	18-3/4	22	17-3/4	20-7/8	40	51
	BBH 37+PLH 37	ICPR02	22-3/4	20-3/4	15-1/2	18-3/4	22	17-3/4	20-7/8	40	56
	BBL 48+PLL 48	ICPR05	22-3/4	18-3/4	15-1/2	18-3/4	22	17-3/4	18-7/8	40	56
19-1/8	BBH 48+PLH 48	ICPR03	22-3/4	22-3/4	19-1/8	18-3/4	22	17-3/4	22-7/8	40	56
	BBH 49+PLH 49	ICPR03	22-3/4	22-3/4	19-1/8	18-3/4	22	17-3/4	22-7/8	40	56
	BBL 60+PLL 60	ICPR03	22-3/4	22-3/4	19-1/8	18-3/4	22	17-3/4	22-7/8	40	60
	BBH 60+PLH 60	ICPR04	22-3/4	26-3/4	19-1/8	18-3/4	22	17-3/4	26-7/8	40	61
22-3/4	BBH 48+PLH 48	ICPR05	22-3/4	22-3/4	22-3/4	18-3/4	22	17-3/4	22-7/8	40	56
	BBL 60+PLL 60	ICPR05	22-3/4	22-3/4	22-3/4	18-3/4	22	17-3/4	22-7/8	40	60
	BBH 60+PLH 60	ICPR06	22-3/4	26-3/4	22-3/4	18-3/4	22	17-3/4	26-7/8	40	61

BB +PL Spec-Tempstar 2. Effective 2/9/01. Supercedes all previous versions. Subject to change without notice.