




DIMENSIONS AND SPECIFICATIONS

Aspen VersaCoil Cased Multi-Position Coils

Designed for Texas Furnace ABA Furnaces

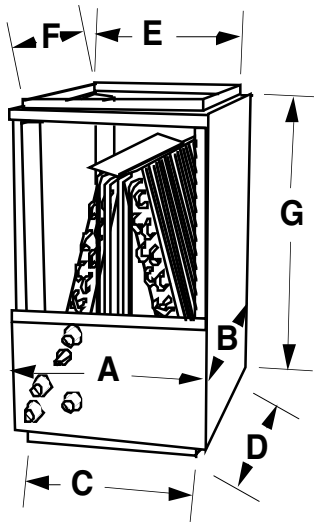

GENERAL SPECIFICATIONS

(Coil shown in vertical configuration with front access panel removed.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS.
- Left-hand refrigerant and plumbing connections.
- Four 3/4" MPT condensate drains. Dual drain in vertical or horizontal position.
- No field-modification required for multi-position applications.
- Factory pre-installed powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 450 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

TEXAS FURNACE MODEL	ASPEN COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
ABA040NH2R, 3R, 060NH2R, 3R, 080NH2R, 3R	BV1** 24	B4B21	14-1/2	21	13-1/4	19-1/4	13-1/4	19-1/4	21
	BVR** 24	B4B15	14-1/2	21	13-1/4	19-1/4	13-1/4	19-1/4	15
	BV1** 30	B4B21	14-1/2	21	13-1/4	19-1/4	13-1/4	19-1/4	21
	BVR** 30	B4B21	14-1/2	21	13-1/4	19-1/4	13-1/4	19-1/4	21
	BV5** 36	B4B21	14-1/2	21	13-1/4	19-1/4	13-1/4	19-1/4	21
	BVR** 36	B4B21	14-1/2	21	13-1/4	19-1/4	13-1/4	19-1/4	21
ABA060NH4R, 080NH4R, 100NH3R, 4R	BV1** 30	B4C21	17-1/2	21	16-1/4	19-1/4	16-1/4	19-1/4	21
	BVR** 30	B4C21	17-1/2	21	16-1/4	19-1/4	16-1/4	19-1/4	21
	BV5** 36	B4C21	17-1/2	21	16-1/4	19-1/4	16-1/4	19-1/4	21
	BVR** 36	B4C21	17-1/2	21	16-1/4	19-1/4	16-1/4	19-1/4	21
	BV5** 42	B4C27	17-1/2	21	16-1/4	19-1/4	16-1/4	19-1/4	27
	BVR** 42	B4C21	17-1/2	21	16-1/4	19-1/4	16-1/4	19-1/4	21
	BV1** 48	B4C27	17-1/2	21	16-1/4	19-1/4	16-1/4	19-1/4	27
	BV5** 48	B4C27	17-1/2	21	16-1/4	19-1/4	16-1/4	19-1/4	27
ABA080NH5R, 100NH5R, 120NH4R, 5R	BV5** 42	B4D23	20-1/2	21	19-1/4	19-1/4	19-1/4	19-1/4	23
	BVR** 42	B4D23	20-1/2	21	19-1/4	19-1/4	19-1/4	19-1/4	23
	BV1** 48	B4D29	20-1/2	21	19-1/4	19-1/4	19-1/4	19-1/4	29
	BV5** 48	B4D29	20-1/2	21	19-1/4	19-1/4	19-1/4	19-1/4	29
	BVR** 48	B4D23	20-1/2	21	19-1/4	19-1/4	19-1/4	19-1/4	23
	BV1** 60	B4D29	20-1/2	21	19-1/4	19-1/4	19-1/4	19-1/4	29
	BV7** 60	B4D29	20-1/2	21	19-1/4	19-1/4	19-1/4	19-1/4	29
	BV2** 60	B5F29	20-1/2	23	19-1/4	19-1/4	19-1/4	19-1/4	29
ABA140NH4R, 5R	BV1** 48	B5G29	23-1/2	21	22-1/4	19-1/4	22-1/4	19-1/4	29
	BV5** 48	B5G29	23-1/2	21	22-1/4	19-1/4	22-1/4	19-1/4	29
	BVR** 48	B5G23	23-1/2	21	22-1/4	19-1/4	22-1/4	19-1/4	23
	BV1** 60	B5G29	23-1/2	21	22-1/4	19-1/4	22-1/4	19-1/4	29
	BV7** 60	B5G29	23-1/2	21	22-1/4	19-1/4	22-1/4	19-1/4	29
	BV2** 60	B5H29	23-1/2	23	22-1/4	19-1/4	22-1/4	19-1/4	29

Versa Spec-Texas Furnace B MBA. Effective 6/21/02. Supersedes all previous versions. Subject to change without notice.