


## DIMENSIONS AND SPECIFICATIONS

### Aspen VersaCoil Cased Multi-Position Coils

Designed for WeatherKing Furnaces

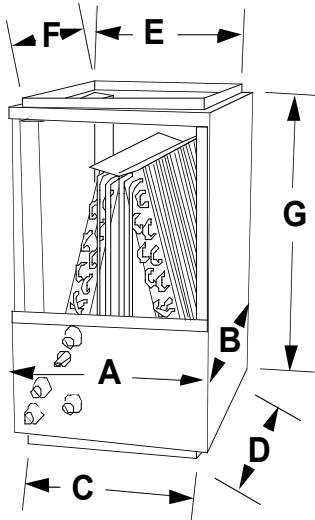

#### GENERAL SPECIFICATIONS

(Coil shown in vertical configuration with front access panel removed.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS.
- Left-hand refrigerant and plumbing connections.
- Three 3/4" FPT condensate drains. Dual drain in vertical or horizontal position.
- No field-modification required for multi-position applications.
- Factory pre-installed powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

WEATHERKING FURNACE MODEL	COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT G
			A	B	C	D	E	F	
WGPJ-05	BVR** 24	BKD15	14	21-3/4	13	20-1/4	12-7/8	19-3/4	15
	BV1** 24	BKD21	14	21-3/4	13	20-1/4	12-7/8	19-3/4	21
	BVR** 30	BKD21	14	21-3/4	13	20-1/4	12-7/8	19-3/4	21
	BV1** 30	BKD21	14	21-3/4	13	20-1/4	12-7/8	19-3/4	21
	BVR** 36	BKD21	14	21-3/4	13	20-1/4	12-7/8	19-3/4	21
	BV5** 36	BKD21	14	21-3/4	13	20-1/4	12-7/8	19-3/4	21
WGPJ-07, -10(A)	BVR** 36	BKY21	17-1/2	21-3/4	16-1/2	20-1/4	16-3/8	19-3/4	21
	BV5** 36	BKY21	17-1/2	21-3/4	16-1/2	20-1/4	16-3/8	19-3/4	21
	BVR** 42	BKY21	17-1/2	21-3/4	16-1/2	20-1/4	16-3/8	19-3/4	21
	BV5** 42	BKY27	17-1/2	21-3/4	16-1/2	20-1/4	16-3/8	19-3/4	27
	BVR** 48	BKY27	17-1/2	21-3/4	16-1/2	20-1/4	16-3/8	19-3/4	27
	BV1** 48	BKY27	17-1/2	21-3/4	16-1/2	20-1/4	16-3/8	19-3/4	27
WGPJ-10(B)	BVR** 48	BKX23	21	21-3/4	20	20-1/4	19-7/8	19-3/4	23
	BV1** 48	BKX29	21	21-3/4	20	20-1/4	19-7/8	19-3/4	29
	BV5** 48	BKX29	21	21-3/4	20	20-1/4	19-7/8	19-3/4	29
	BV1** 60	BKX29	21	21-3/4	20	20-1/4	19-7/8	19-3/4	29
	BV2** 60	BKJ29	21	23	20	20-1/4	19-7/8	19-3/4	29
	BV7** 60	BKX29	21	21-3/4	20	20-1/4	19-7/8	19-3/4	29
WGPJ-12, -15	BVR** 48	BKZ23	24-1/2	21-3/4	23-1/2	20-1/4	23-3/8	19-3/4	23
	BV1** 48	BKZ29	24-1/2	21-3/4	23-1/2	20-1/4	23-3/8	19-3/4	29
	BV5** 48	BKZ29	24-1/2	21-3/4	23-1/2	20-1/4	23-3/8	19-3/4	29
	BV1** 60	BKZ29	24-1/2	21-3/4	23-1/2	20-1/4	23-3/8	19-3/4	29
	BV2** 60	BKL29	24-1/2	23	23-1/2	20-1/4	23-3/8	19-3/4	29
	BV7** 60	BKZ29	24-1/2	21-3/4	23-1/2	20-1/4	23-3/8	19-3/4	29

Note: Refrigerant and primary drain connections to be centered on a line 4" from left side of cabinet.

Secondary drain connection for upflow position will be 2" to the right of primary.