




DIMENSIONS AND SPECIFICATIONS

Aspen VersaCoil Cased Multi-Position Coils

Designed for York G8C Multi-Position, G9T Upflow, and G9D Downflow/Horizontal Furnaces

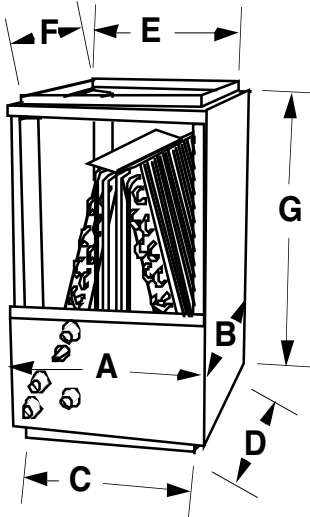

GENERAL SPECIFICATIONS

(Coil shown in vertical configuration with front access panel removed.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS.
- Left-hand refrigerant and plumbing connections.
- Three 3/4" MPT condensate drains. Dual drain in vertical or horizontal position.
- No field-modification required for multi-position applications.
- Factory pre-installed powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

FURNACE MODEL	COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
G9T04008UPA13	BV1** 24	BYR21	14-1/2	21-3/4	13-1/2	20-1/4	13-1/2	20-1/4	21
	BVR** 24	BYR15	14-1/2	21-3/4	13-1/2	20-1/4	13-1/2	20-1/4	15
	BV1** 30	BYR21	14-1/2	21-3/4	13-1/2	20-1/4	13-1/2	20-1/4	21
	BVR** 30	BYR21	14-1/2	21-3/4	13-1/2	20-1/4	13-1/2	20-1/4	21
	BV5** 36	BYR21	14-1/2	21-3/4	13-1/2	20-1/4	13-1/2	20-1/4	21
	BVR** 36	BYR21	14-1/2	21-3/4	13-1/2	20-1/4	13-1/2	20-1/4	21
G9D06012DHB11	BV5** 36	BYK21	17-1/2	21-3/4	16-1/2	20-1/4	16-1/2	20-1/4	21
G9D08012DHB11	BVR** 36	BYK21	17-1/2	21-3/4	16-1/2	20-1/4	16-1/2	20-1/4	21
G9T08012UPB13	BV5** 42	BYK27	17-1/2	21-3/4	16-1/2	20-1/4	16-1/2	20-1/4	27
G9T06010UPB13	BVR** 42	BYK21	17-1/2	21-3/4	16-1/2	20-1/4	16-1/2	20-1/4	21
G8C05012MUB11	BV1** 48	BYK27	17-1/2	21-3/4	16-1/2	20-1/4	16-1/2	20-1/4	27
G8C07512MUB11	BV5** 48	BYK27	17-1/2	21-3/4	16-1/2	20-1/4	16-1/2	20-1/4	27
	BVR** 48	BYK27	17-1/2	21-3/4	16-1/2	20-1/4	16-1/2	20-1/4	27
G9D08016DHC11	BV1** 48	BYL29	21	21-3/4	20	20-1/4	20	20-1/4	29
G9D10020DHC11	BV5** 48	BYL29	21	21-3/4	20	20-1/4	20	20-1/4	29
G9T08016UPC13	BVR** 48	BYL23	21	21-3/4	20	20-1/4	20	20-1/4	23
G9T10014UPC13	BV1** 60	BYL29	21	21-3/4	20	20-1/4	20	20-1/4	29
G9T10020UPC13									
G8C07516MUC11	BV7** 60	BYL29	21	21-3/4	20	20-1/4	20	20-1/4	29
G8C10016MUC11									
G9D12020DHD11	BV1** 60	BYM29	24-1/2	21-3/4	23-1/2	20-1/4	23-1/2	20-1/4	29
G9T12020UPD13									
G9T14020UPD13									
G8C10020MUD11	BV7** 60	BYM29	24-1/2	21-3/4	23-1/2	20-1/4	23-1/2	20-1/4	29
G8C11520MUD11									

Versa Spec-York B G8C G9T G9D. Effective 7/29/99. Supersedes all previous versions. Subject to change without notice.