


DIMENSIONS AND SPECIFICATIONS

Aspen VersaCoil Cased Multi-Position Coils

Designed for York and Evcon/Coleman Furnaces

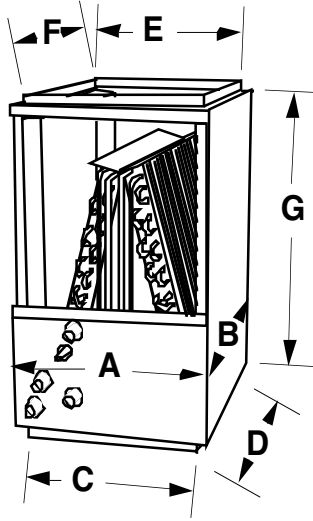

GENERAL SPECIFICATIONS

(Coil shown in vertical configuration with front access panel removed.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS.
- Left-hand refrigerant and plumbing connections.
- Three 3/4" MPT condensate drains. Dual drain in vertical or horizontal position.
- No field-modification required for multi-position applications.
- Factory pre-installed powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy guage embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

FURNACE MODEL	COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
BGM05012B(X)U BGM07512B(X)U	BVR** 24	BYN19	17-1/2	21-3/4	16-1/4	20-1/4	14-1/4	18-3/8	19
	BV1** 24	BYN19	17-1/2	21-3/4	16-1/4	20-1/4	14-1/4	18-3/8	19
	BVR** 30	BYN19	17-1/2	21-3/4	16-1/4	20-1/4	14-1/4	18-3/8	19
	BVR** 36	BYN19	17-1/2	21-3/4	16-1/4	20-1/4	14-1/4	18-3/8	19
	BV1** 36	BYN23	17-1/2	21-3/4	16-1/4	20-1/4	14-1/4	18-3/8	23
BGM07516B(X)U BGM10016B(X)U	BVR** 36	BYP19	21	21-3/4	19-3/4	20-1/4	17-3/4	18-3/8	19
	BV1** 36	BYP27	21	21-3/4	19-3/4	20-1/4	17-3/4	18-3/8	27
	BV1** 42	BYP27	21	21-3/4	19-3/4	20-1/4	17-3/4	18-3/8	27
	BV1** 48	BYP27	21	21-3/4	19-3/4	20-1/4	17-3/4	18-3/8	27
BGM10020B(X)U BGM12520B(X)U	BV1** 48	BYQ27	24-1/2	21-3/4	23-1/4	20-1/4	21-1/4	18-3/8	27
	BV1** 60	BYQ27	24-1/2	21-3/4	23-1/4	20-1/4	21-1/4	18-3/8	27
	BV7** 60	BYQ29	24-1/2	21-3/4	23-1/4	20-1/4	21-1/4	18-3/8	29