




DIMENSIONS AND SPECIFICATIONS

Aspen VersaCoil Cased Multi-Position Coils

Designed for York G8C Multi-Position Furnaces

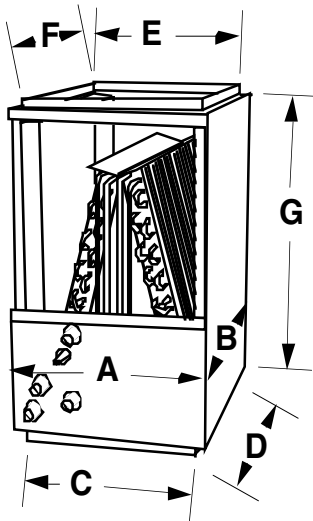

GENERAL SPECIFICATIONS

(Coil shown in vertical configuration with front access panel removed.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS.
- Left-hand refrigerant and plumbing connections.
- Three 3/4" MPT condensate drains. Dual drain in vertical or horizontal position.
- No field-modification required for multi-position applications.
- Factory pre-installed powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy guage embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

FURNACE MODEL	COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
G8C05012MUB11 G8C07512MUB11	BV5** 36	BYN21	17-1/2	21-3/4	16-1/2	20-1/4	15	19-3/4	21
	BVR** 36	BYN21	17-1/2	21-3/4	16-1/2	20-1/4	15	19-3/4	21
	BV5** 42	BYN27	17-1/2	21-3/4	16-1/2	20-1/4	15	19-3/4	27
	BVR** 42	BYN21	17-1/2	21-3/4	16-1/2	20-1/4	15	19-3/4	21
	BV1** 48	BYN27	17-1/2	21-3/4	16-1/2	20-1/4	15	19-3/4	27
	BV5** 48	BYN27	17-1/2	21-3/4	16-1/2	20-1/4	15	19-3/4	27
G8C07516MUC11 G8C10016MUC11	BVR** 48	BYN27	17-1/2	21-3/4	16-1/2	20-1/4	15	19-3/4	27
	BV1** 48	BYP29	21	21-3/4	20	20-1/4	18-1/2	19-3/4	29
	BV5** 48	BYP29	21	21-3/4	20	20-1/4	18-1/2	19-3/4	29
	BVR** 48	BYP23	21	21-3/4	20	20-1/4	18-1/2	19-3/4	23
	BV1** 60	BYP29	21	21-3/4	20	20-1/4	18-1/2	19-3/4	29
G8C10020MUD11 G8C11520MUD11	BV7** 60	BYP29	21	21-3/4	20	20-1/4	18-1/2	19-3/4	29
	BV1** 60	BYQ29	24-1/2	21-3/4	23-1/2	20-1/4	22	19-3/4	29
	BV2** 60	BWE29	24-1/2	23	23-1/2	20-1/4	22	19-3/4	29
	BV7** 60	BYQ29	24-1/2	21-3/4	23-1/2	20-1/4	22	19-3/4	29