


DIMENSIONS AND SPECIFICATIONS

Aspen VersaCoil Cased Multi-Position Coils

Designed for York P3HU Upflow/Horizontal and
P3DH Downflow/Horizontal Furnaces

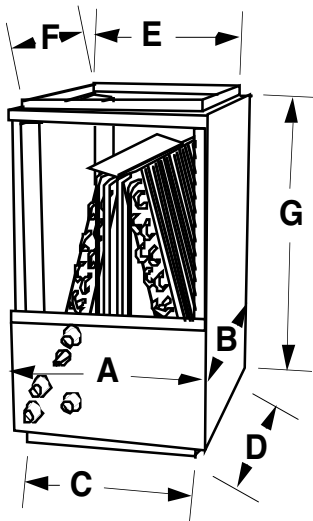

GENERAL SPECIFICATIONS

(Coil shown in vertical configuration with front access panel removed.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS.
- Left-hand refrigerant and plumbing connections.
- Three 3/4" MPT condensate drains. Dual drain in vertical or horizontal position.
- No field-modification required for multi-position applications.
- Factory pre-installed powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

FURNACE MODEL	COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
P3HUA* P3DHA*	BVR** 24	BYR19	14-1/2	21-3/4	13-1/2	20-1/4	11-1/2	19	19
	BV1** 24	BYR19	14-1/2	21-3/4	13-1/2	20-1/4	11-1/2	19	19
	BVR** 30	BYR19	14-1/2	21-3/4	13-1/2	20-1/4	11-1/2	19	19
	BV1** 30	BYR19	14-1/2	21-3/4	13-1/2	20-1/4	11-1/2	19	19
	BV5** 36	BYR23	14-1/2	21-3/4	13-1/2	20-1/4	11-1/2	19	23
	BVR** 36	BYR19	14-1/2	21-3/4	13-1/2	20-1/4	11-1/2	19	19
	BV5** 42	BYR23	14-1/2	21-3/4	13-1/2	20-1/4	11-1/2	19	23
	BVR** 42	BYR23	14-1/2	21-3/4	13-1/2	20-1/4	11-1/2	19	23
P3HUB*	BVR** 42	BYK23	17-1/2	21-3/4	16-1/2	20-1/4	14-1/2	19	23
P3DHB*	BVR** 48	BYK23	17-1/2	21-3/4	16-1/2	20-1/4	14-1/2	19	23
P3HUC*	BV1** 60	BYL29	21	21-3/4	20	20-1/4	18	19	29
P3DHC*	BV7** 60	BYL29	21	21-3/4	20	20-1/4	18	19	29