




DIMENSIONS AND SPECIFICATIONS

Aspen VersaCoil Cased Multi-Position Coils

Designed for York PV9-UP Upflow Furnaces

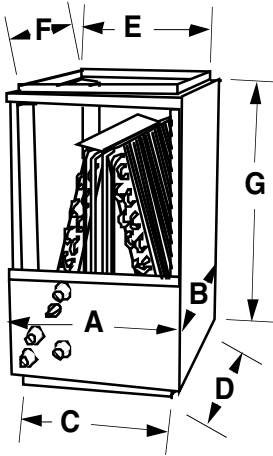

GENERAL SPECIFICATIONS

(Coil shown in vertical configuration with front access panel removed.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS.
- Left-hand refrigerant and plumbing connections.
- Three 3/4" FPT condensate drains. Dual drain in vertical or horizontal position.
- No field-modification required for multi-position applications.
- Factory pre-installed powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrate standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rified copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

FURNACE MODEL	COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
PV9A*	BVR** 24	BYR17	14-1/2	21-3/4	13-1/2	20-1/4	12	19-3/4	17
	BV1** 24	BYR17	14-1/2	21-3/4	13-1/2	20-1/4	12	19-3/4	17
	BVR** 30	BYR17	14-1/2	21-3/4	13-1/2	20-1/4	12	19-3/4	17
	BV1** 30	BYR23	14-1/2	21-3/4	13-1/2	20-1/4	12	19-3/4	23
	BVR** 36	BYR23	14-1/2	21-3/4	13-1/2	20-1/4	12	19-3/4	23
	BV5** 36	BYR23	14-1/2	21-3/4	13-1/2	20-1/4	12	19-3/4	23
	BV1** 48	BYR29	14-1/2	21-3/4	13-1/2	20-1/4	12	19-3/4	29
	BV5** 48	BYR29	14-1/2	21-3/4	13-1/2	20-1/4	12	19-3/4	29
PV9B*	BVR** 24	BYN17	17-1/2	21-3/4	16-1/2	20-1/4	15	19-3/4	17
	BV1** 24	BYN17	17-1/2	21-3/4	16-1/2	20-1/4	15	19-3/4	17
	BVR** 30	BYN17	17-1/2	21-3/4	16-1/2	20-1/4	15	19-3/4	17
	BVR** 36	BYN23	17-1/2	21-3/4	16-1/2	20-1/4	15	19-3/4	23
	BV5** 36	BYN23	17-1/2	21-3/4	16-1/2	20-1/4	15	19-3/4	23
	BVR** 42	BYN23	17-1/2	21-3/4	16-1/2	20-1/4	15	19-3/4	23
	BVR** 48	BYN23	17-1/2	21-3/4	16-1/2	20-1/4	15	19-3/4	23
	BV1** 48	BYN29	17-1/2	21-3/4	16-1/2	20-1/4	15	19-3/4	29
	BV5** 48	BYN29	17-1/2	21-3/4	16-1/2	20-1/4	15	19-3/4	29
BV2** 60	BWF29	17-1/2	23	16-1/2	20-1/4	15	19-3/4	29	
BV7** 60	BYN29	17-1/2	21-3/4	16-1/2	20-1/4	15	19-3/4	29	
PV9C*	BVR** 30	BYP17	21	21-3/4	20	20-1/4	18-1/2	19-3/4	17
	BVR** 36	BYP23	21	21-3/4	20	20-1/4	18-1/2	19-3/4	23
	BV5** 36	BYP23	21	21-3/4	20	20-1/4	18-1/2	19-3/4	23
	BVR** 42	BYP23	21	21-3/4	20	20-1/4	18-1/2	19-3/4	23
	BVR** 48	BYP23	21	21-3/4	20	20-1/4	18-1/2	19-3/4	23
	BV1** 48	BYP29	21	21-3/4	20	20-1/4	18-1/2	19-3/4	29
	BV5** 48	BYP29	21	21-3/4	20	20-1/4	18-1/2	19-3/4	29
	BV1** 60	BYP29	21	21-3/4	20	20-1/4	18-1/2	19-3/4	29
	BV2** 60	BWD29	21	23	20	20-1/4	18-1/2	19-3/4	29
BV7** 60	BYP29	21	21-3/4	20	20-1/4	18-1/2	19-3/4	29	
PV9D*	BVR** 42	AYQ24	24-1/2	21-3/4	23-1/2	20-1/4	22	19-3/4	24
	BVR** 48	AYQ24	24-1/2	21-3/4	23-1/2	20-1/4	22	19-3/4	24
	BV1** 60	AYQ24	24-1/2	21-3/4	23-1/2	20-1/4	22	19-3/4	24
	BV2** 60	AYE26	24-1/2	23	23-1/2	20-1/4	22	19-3/4	26

Versa Spec-York PV9 B. Effective 2/28/05. Supercedes all previous versions. Subject to change without notice.