


# CX SERIES

## COPPER DEDICATED HORIZONTAL EVAPORATOR COIL

### FEATURES, BENEFITS, DIMENSIONS, & SPECIFICATIONS

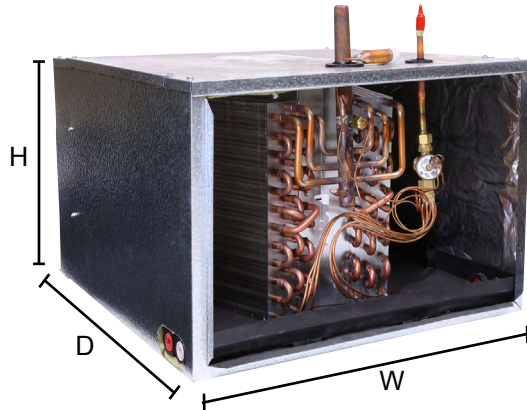

Unit shown with service panels removed. Representative drawing only. Some models may vary in appearance. Due to continuous product improvement, specifications are subject to change without notice.

### FEATURES AND BENEFITS:

- Rifled aluminum tubing, enhanced aluminum fins.
- Air pressure tested at 500 psi, leak tested with Helium, then Nitrogen-pressurized and sealed.
- Inlet and outlet dimensions are identical (without end caps).
- Externally mounted flowrater body with Schrader valve for hiss-testing or internally mounted factory installed TXV.
- Refrigerant lines exit top of coil.
- Three-piece service door.
- Embossed galvanized cabinets standard. (OEM painted cabinet available).
- Fully insulated cabinets with faced insulation.
- Built-in auxiliary drain pan with 3/4" FPT.
- Heavy duty plastic drain pan with four 3/4" FPT condensate drains (two per side).
- AHRI certifiable with all brands of A/C and heat pump systems.
- ETL listed for use with R-22, R-410A, R-454A, and R-32 when proper metering device is used.
- Ten-year limited warranty with registration.



### WANT MORE INFORMATION ON ASPEN'S CX SERIES EVAPORATOR COILS?

SCAN QR CODE TO VISIT THIS PRODUCT ON OUR WEBSITE



*For complete warranty details, please visit our Warranty Information tab when you visit Aspen's website.  
To view this coil's product information online for the most up-to-date information scan the QR Code.*

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website.

CX Spec-2025-03

# SPECIFICATIONS & PERFORMANCE:

COIL MODEL	NOMINAL CAPACITY (BTUs)	DIMENSIONS					SHIPPING INFORMATION			
		CABINET			COIL		WEIGHT (LBS)		SKID QTY	
		WIDTH (W)	DEPTH (D)	HEIGHT (H)	WIDTH	HEIGHT	3 ROW	4 ROW		
CX24A*	24,000	21	22	14-1/2	20	13-1/2	35	39	16	
CX24B*			22	15		14	37	42	16	
CX24E*			27	17-1/2		16-1/2	50	57	16	
CX30A*	30,000		22	15		14	37	42	16	
CX30E*			27	17-1/2		16-1/2	50	57	16	
CX36A*	36,000		22	15		14	37	42	16	
CX36B*			27	17-1/2		16-1/2	47	53	16	
CX36C*			22	17-1/2		16-1/2	41	47	16	
CX36E*			27	21		20	56	65	12	
CX42C*	42,000		27	21		20	58	67	12	
CX42D*			32	21		20	65	74	6	
CX48A*	48,000		27	17-1/2		16-1/2	49	56	16	
CX48B*			27	21		20	56	64	12	
CX48C*			27	21		20	56	65	12	
CX48D*			32	21		20	66	75	6	
CX60A*	60,000		27	21		20	58	67	6	
CX60B*		32	21	20	66	75	6			
CX60C*		32	24-1/2	23-1/2	77	90	6			
CX60D*		32	25	24	79	91	6			
CX60E*		32	25	24	82	95	6			

DRAIN PAN TEMPERATURE TABLE	
DRAIN PAN TYPE	TEMP LIMITS
Plastic - Standard	290°
Plastic - High Temp	425°
Metal - High Temp	600°

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. CX Spec-2025-03

**CX DEDICATED HORIZONTAL COPPER COIL**

