


DX SERIES

ALUMINUM DEDICATED HORIZONTAL EVAPORATOR COIL

FEATURES, BENEFITS, DIMENSIONS, & SPECIFICATIONS

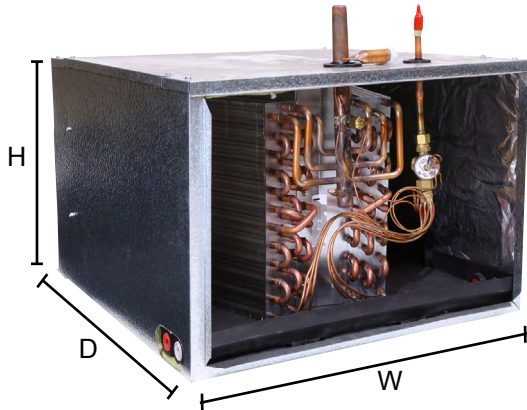

Unit shown with service panels removed. Representative drawing only. Some models may vary in appearance. Due to continuous product improvement, specifications are subject to change without notice.

FEATURES AND BENEFITS:

- Rifled aluminum tubing, enhanced aluminum fins.
- Air pressure tested at 500 psi, leak tested with Helium, then Nitrogen-pressurized and sealed.
- Inlet and outlet dimensions are identical (without end caps).
- Externally mounted flowrater body with Schrader valve for hiss-testing or internally mounted factory installed TXV.
- Refrigerant lines exit top of coil.
- Three-piece service door.
- Embossed galvanized cabinets standard. (OEM painted cabinet available).
- Fully insulated cabinets with faced insulation.
- Built-in auxiliary drain pan with 3/4" FPT.
- Heavy duty plastic drain pan with four 3/4" FPT condensate drains (two per side).
- AHRI certifiable with all brands of A/C and heat pump systems.
- ETL listed for use with R-22, R-410A, R-454A, and R-32 when proper metering device is used.
- Ten-year limited warranty with registration.



WANT MORE INFORMATION ON ASPEN'S DX SERIES EVAPORATOR COILS?

SCAN QR CODE TO VISIT THIS PRODUCT ON OUR WEBSITE



For complete warranty details, please visit our Warranty Information tab when you visit Aspen's website. To view this coil's product information online for the most up-to-date information scan the QR Code.

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website.

DX Spec-2025-03



SPECIFICATIONS & PERFORMANCE:

COIL MODEL	NOMINAL CAPACITY (BTU)	DIMENSIONS					SHIPPING INFORMATION		
		CABINET			COIL		WEIGHT (LBS)		SKID QTY
		WIDTH (W)	DEPTH (D)	HEIGHT (H)	WIDTH	HEIGHT	3 ROW	4 ROW	
DX24A*	24,000	21	22	14-1/2	20	13-1/2	35	39	16
DX24B*			22	15		14	37	42	16
DX24E*			27	17-1/2		16-1/2	50	57	16
DX30A*	30,000		22	15		14	37	42	16
DX30E*			27	17-1/2		16-1/2	50	57	16
DX36A*	36,000		22	15		14	37	42	16
DX36B*			27	17-1/2		16-1/2	47	53	16
DX36C*			22	17-1/2		16-1/2	41	47	16
DX36D*			32	21		20	56	65	6
DX36E*			27	21		20	56	65	12
DX42C*	42,000		27	21		20	58	67	12
DX42D*			32	21		20	65	74	6
DX48A*	48,000		27	17-1/2		16-1/2	49	56	16
DX48B*			27	21		20	56	64	12
DX48C*			27	21		20	56	65	12
DX48D*			32	21		20	66	75	6
DX60A*	60,000		27	21		20	58	67	6
DX60B*			32	21		20	66	75	6
DX60C*			32	24-1/2		23-1/2	77	90	6
DX60D*			32	25		24	79	91	6
DX60E*			32	25		24	82	95	6
DX60F*			32	24-1/2		23-1/2	69	79	6

DRAIN PAN TEMPERATURE TABLE

DRAIN PAN TYPE	TEMP LIMITS
Plastic - Standard	290°
Plastic - High Temp	425°
Metal - High Temp	600°

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. DX Spec-2025-03