


# BH SERIES


## MULTI-POSITION ELECTRIC HEAT LIGHT COMMERCIAL EVAPORATOR COIL

### FEATURES, BENEFITS, DIMENSIONS, & SPECIFICATIONS

#### SINGLE CIRCUIT COIL

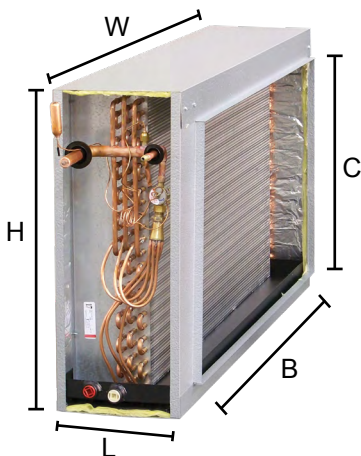

#### DOUBLE CIRCUIT COIL

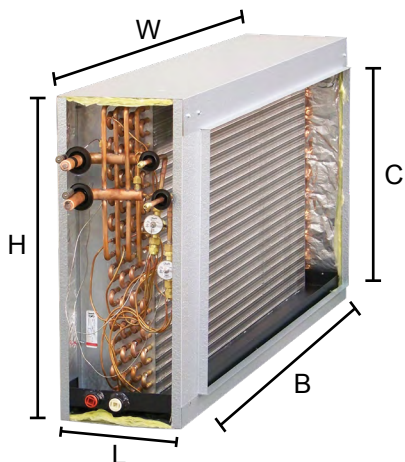

Unit shown with service panels removed. Representative drawing only. Some models may vary in appearance. Due to continuous product improvement, specifications are subject to change without notice.

#### FEATURES AND BENEFITS:

- Rifled copper tubing, enhanced aluminum fins.
- Standard refrigerant connections:
  - Liquid line - 3/8" ODS
  - Suction line - 7/8" ODS
- One 3/4" MPT condensate drain.
- Every coil immersion-tested at 450 psi, then Nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Factory installed 20% bleed port TXV(s) standard. (See note for TXV options)
- Powder-painted galvanized steel drain pans. Stainless available.
- Single circuit. Dual circuitry available.
- Dual circuit coils can be split top-to-bottom or interfaced.
- Front access panel for easy service.
- ETL listed for use with R-410A, R-454B, and R-32 when proper metering device is used.
- Five-year limited warranty.



**WANT MORE INFO ON ASPEN'S BH LIGHT  
COMMERCIAL SERIES EVAPORATOR COILS?**

SCAN QR CODE TO VISIT THIS PRODUCT ON OUR WEBSITE



*For complete warranty details, please visit our Warranty Information tab when you visit Aspen's website.*

*To view this coil's product information online for the most up-to-date information scan the QR Code.*

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. BHComm Spec-2025-03

# SPECIFICATIONS & PERFORMANCE:

COIL MODEL	DIMENSIONS					SHIPPING INFORMATION		
	HEIGHT (H)	LENGTH (L)	WIDTH (W)''	OPENINGS		2 ROW	3 ROW	4 ROW
				(C)	(B)			
SINGLE CIRCUIT COILS								
BHA24 36+X*	23-1/2	10	29-1/2	21	24	29	43	N/A
BHA40 48+X*	23-1/2		34-1/2		29	35	49	N/A
BHA40 60+X*	25		34-1/2		29	45	54	N/A
BH132 72+X*	25-1/2		41-1/2		36	44	58	N/A
BH332 72+X*	25-1/2		47-1/2		42	N/A	68	82
BH132 90+X*	25-1/2		47-1/2		42	N/A	68	82
BH332 90+X*	25-1/2		50-1/2		45	N/A	73	87
BH132 120+X*	25-1/2		47-1/2		42	N/A	68	82
BH332 120+X*	25-1/2		50-1/2		45	N/A	73	87
DOUBLE CIRCUIT COILS								
BHA24 36+X* XXX	23-1/2	10	29-1/2	21	24	29	43	N/A
BHA40 48+X* XXX	23-1/2		34-1/2		29	35	49	N/A
BHA40 60+X* XXX	25		34-1/2		29	45	54	N/A
BH140 72+X* XXX	25-1/2		41-1/2		36	44	58	N/A
BH340 72+X* XXX	25-1/2		47-1/2		42	N/A	68	82
BH140 90+X* XXX	25-1/2		47-1/2		42	N/A	68	82
BH340 90+X* XXX	25-1/2		50-1/2		45	N/A	73	87
BH140 120+X* XXX	25-1/2		47-1/2		42	N/A	68	82
BH340 120+X* XXX	25-1/2		50-1/2		45	N/A	73	87

**TXV offering (factory installed):** Order X4 for R410 XXX: TTB = Top to Bottom; INT = Interfaced

Notes: Slabs are oriented with delta plates facing the side walls of the cabinet. Refrigerant and plumbing connections exit cabinet front. Top duct opening size can be obtained by subtracting 1.50 from width or depth. Bottom duct opening size can be obtained by subtracting 3/4 from width or depth. CC120D coil available only in 50 1/2" width, but can fit multiple furnace dimensions with supplied block off plates. (\*0 = 50/50 circuit split; 1 = intertwined circuits)

DUAL CIRCUIT COMMERCIAL COILS	SINGLE CIRCUIT R410A TXV	DUAL CIRCUIT USE 2 R410A TXV
CC72**(*)	(4) 4202	(4) 4200
CC90**(*)	(4) 3947+3948	(4) 4202
CC120**(*)		

DRAIN PAN TEMPERATURE TABLE	
DRAIN PAN TYPE	TEMP LIMITS
Plastic - Standard	290°
Plastic - High Temp	425°
Metal - High Temp	600°

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. BHComm Spec-2025-03

