


CC SERIES

CASED COPPER UPFLOW/DOWNFLOW

FEATURES, BENEFITS, DIMENSIONS, & SPECIFICATIONS

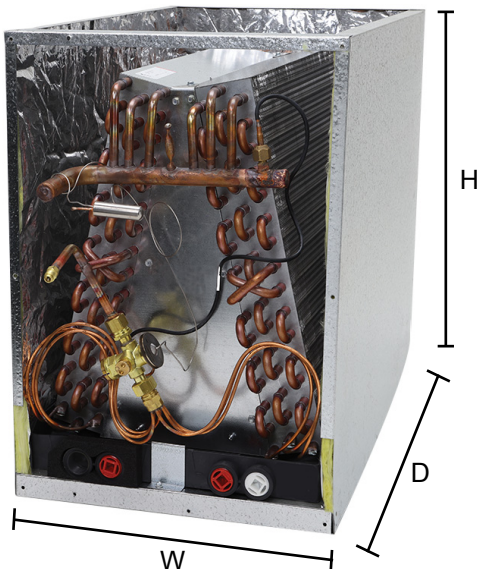

Unit shown with service panels removed. Representative drawing only. Some models may vary in appearance. Due to continuous product improvement, specifications are subject to change without notice.

FEATURES AND BENEFITS:

- Rifled copper tubing, enhanced aluminum fins.
- Left/right-hand refrigerant/plumbing connections.
 - Liquid line - 3/8" ODS
 - Suction line
 - 3/4" ODS on 1-1/2-ton to 3-ton
 - 7/8" on 3-1/2-ton to 5-ton
- Schrader mounted on end of Liquid Line for hiss-testing
- Heavy duty plastic drain pans on most models.
- Immersion-tested at 500 psi, then Nitrogen-pressurized and sealed.
- Embossed galvanized cabinets standard.
- Upflow without field modification. Downflow applications require plate kit, sold separately.
- Split access doors in front for easy access.
- Fully insulated cabinets with faced insulation.
- AHRI certifiable with all brands of A/C and heat pump systems.
- ETL listed for use with R-410A, R-454B, R-22, and R-32 when proper metering device is used.
- Ten-year limited warranty.

CUSTOMIZATION

- Factory or field-installed TXV available.
- Powder-painted metal pans.
- Schrader mounted on suction manifold, external to cabinet.

DOWNFLOW KIT PARTS

METAL DRAIN PANS:

- 16" DWNFLWM-16 • 18" DWNFLWM-18

PLASTIC DRAIN PANS:

- DWNFLWP



WANT MORE INFORMATION ON ASPEN'S CC SERIES EVAPORATOR COILS?

SCAN QR CODE TO VISIT THIS PRODUCT ON OUR WEBSITE



For complete warranty details, please visit our Warranty Information tab when you visit Aspen's website. To view this coil's product information online for the most up-to-date information scan the QR Code.

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. CC Spec-2025-04



SPECIFICATIONS & PERFORMANCE:

COIL MODEL	NOMINAL CAPACITY (BTUs)	CABINET DIMENSIONS				SHIPPING INFO.			
		MIN. WIDTH	MAX. WIDTH (W)	DEPTH (D)	HEIGHT (H)	WEIGHT (LBS)			SKID QTY
						2 ROW	3 ROW	4 ROW	
CC24A*	24,000	14	23	21-1/2	16	29	37	45	20
CC24B*		14	23		16	34	44	52	20
CC24C*		14	23		20	39	50	59	16
CC24D*		14	23		20	44	56	67	16
CC30A*	30,000	14	23		16	34	44	52	20
CC30B*		14	23		20	39	50	59	16
CC30C*		14	23		20	44	56	67	16
CC30D*		14	23		24	49	62	74	12
CC30E*		14	23		24	51	64	76	12
CC36A*	36,000	2/3R - 14; 4R-17	23		20	39	50	59	16
CC36B*			23		20	44	56	67	16
CC36C*			23		24	49	62	74	12
CC36D*			23		24	54	69	82	12
CC36E*			23		20	39	50	59	16
CC36F*		17	26-1/2		28	63	81	96	12
CC42A*	42,000	17	26-1/2		20	44	56	67	16
CC42B*		17	26-1/2	24	49	62	74	12	
CC42C*		17	26-1/2	24	54	69	82	12	
CC42D*		17	26-1/2	28	58	75	89	12	
CC42E*		17	26-1/2	20	44	45	67	16	
CC42F*		17	26-1/2	28	63	81	96	12	
CC48A*	48,000	17	26-1/2	24	49	62	74	12	
CC48B*		17	26-1/2	24	54	69	82	12	
CC48C*		17	26-1/2	28	58	75	89	12	
CC48D*		17	26-1/2	28	63	81	96	12	
CC48F*		17	26-1/2	28	60	77	91	12	
CC48G*		17	26-1/2	28	65	83	98	12	
CC60A*	60,000	20-1/2	26-1/2	28	58	75	89	12	
CC60B*		20-1/2	26-1/2	28	63	81	96	12	
CC60C* (3)		20-1/2	26-1/2	23	28	66	84	100	12
CC60D* (3)		20-1/2	26-1/2	23	28	71	91	108	12
CC60E* (3)		24-1/2	26-1/2	21-1/2	28	79	101	120	12
CC60F*		20-1/2	26-1/2	21-1/2	28	60	77	91	12
CC60G* (4)		24-1/2	26-1/2	21-1/2	28	81	103	122	12

Notes: 1) Not all drain pan sizes are currently available in heavy duty plastic. Check with your local Aspen representative for current availability. 2) Do not use heavy duty plastic drain pans on oil furnaces or other applications where outlet temperatures may exceed 290°F +/-5°F. Specify metal drain pans for these applications. 3) Metal drain pan. Slab is rotated 90° inside cabinet. Refrigerant and plumbing connections still exit cabinet front. 4) Metal drain pan.

DRAIN PAN TEMPERATURE TABLE	
DRAIN PAN TYPE	TEMP LIMITS
Plastic - Standard	290°
Plastic - High Temp	425°
Metal - High Temp	600°

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. CC Spec-2025-04