




CE SERIES COILS

CASED COPPER MULTI-POSITION

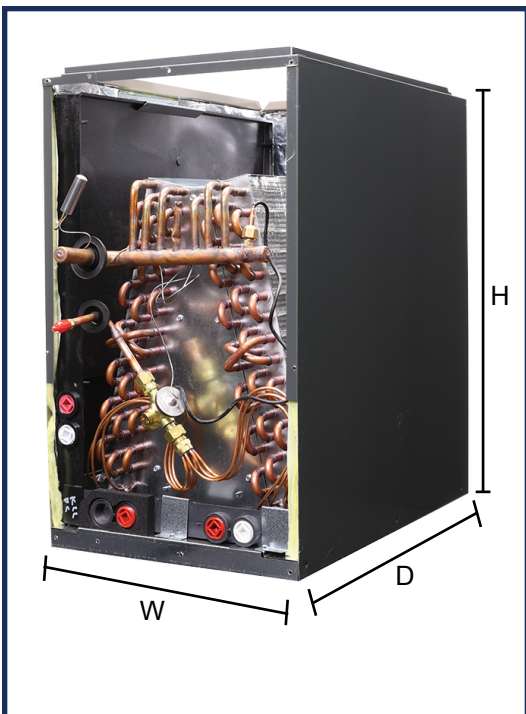

Unit shown with service panels removed. Representative image only. Some models may vary in appearance.

STANDARD FEATURES

- Rifled copper tubing, enhanced aluminum fins.
- Standard Upflow without field modification. Downflow applications require field-installed downflow kit, sold separately.
- Immersion tested at 500 psi, followed by nitrogen pressurization and factory sealing to ensure optimal system integrity and long-term reliability.
- Schrader provided for pressure assurance testing.
- Refrigerant lines exit top of coil. Schrader valve on liquid line or internally mounted factory installed TXV for pressure assurance testing. Refrigerant and plumbing connections:
 - **Liquid line:** 3/8" ODS
 - **Condensate Drains:** 3/4" NPT
 - **Suction line:**
 - ▶ 3/4" ODS on 1-1/2-ton to 3-ton
 - ▶ 7/8" ODS on 3-1/2-ton to 5-ton
- Heavy duty plastic drain pans on most models, powder coated galvanized steel horizontal drain pans standard on all.
- Fully insulated cabinets with faced insulation. Split access doors in front of cabinet for easy service access.
- AHRI certifiable with all brands of A/C and heat pump systems.
- A2L refrigerants require a Refrigerant Detection System (RDS) for compliance.
- ETL listed for R22 and 410A. ETL listed for R454B and R32 with Refrigerant Detection System (RDS).

WARRANTY

- Ten-year limited warranty with registration.

CUSTOMIZATION

- Factory or field-installed TXV available.
- Powder-painted metal pans.
- Painted cabinets.

DOWNFLOW KITS

METAL DRAIN PANS:

- 16" DWNFLWM-16
- 18" DWNFLWM-18

PLASTIC DRAIN PANS: DWNFLWP

DRAIN PAN TEMPERATURE TABLE

DRAIN PAN TYPE	TEMP LIMITS
Plastic - Standard	290°
Plastic - High Temp	425°
Metal - High Temp	600°

CE-SS-C-004

HELPFUL LINKS



VIEW PRODUCT ONLINE

For full warranty terms and conditions, please refer to the Warranty Information section on Aspen's official website.



AHRI QUICK MATCH TOOL

Identify the correct AHRI-certified match for any Aspen coil, air handler, or Aspen PRO air handler. Available on the Resources page.



R-410A • R-22 • R-454B • R-32
REFRIGERANT READY
WHEN PROPER METERING DEVICE IS USED



In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2025 Aspen Manufacturing. All Rights Reserved

Customer Service: info@aspenmfg.com • Warranty Team: warranty@aspenmfg.com • Phone: 281.441.6500 • Toll Free: 800.423.9007 • Fax: 281.441.6510



WWW.ASPENMFG.COM

Performance & Dimensional Data (In.)																
Coil Model	Nom. Capacity (BTU)	Connections		Cabinet Dimensions									Shipping Info.			
		Liq. Line	Suct. Line	Standard Cabinet Width							Depth	Height	Weight (Lbs)			Skid Qty
				W"									# of Rows			
				OD	OD	14"	14-1/2"	17"	17-1/2"	21"	24"	24-1/2"	D"	H"	2	3
CE24A*	24,000	3/8	3/4	14(4)	14-1/2(4)	17(4)	17-1/2(4)	21	-	-	21-1/2	19	31	39	46	20
CE24B*		3/8	3/4	14(4)	14-1/2(4)	17(4)	17-1/2(4)	21	-	-	21-1/2	19	36	45	54	20
CE24C*		3/8	3/4	14(4)	14-1/2(4)	17(4)	17-1/2(4)	21	-	-	21-1/2	23	41	52	61	12
CE24D*		3/8	3/4	14(4)	14-1/2(4)	17(4)	17-1/2(4)	21	-	-	21-1/2	23	46	58	69	12
CE30A*	30,000	3/8	3/4	14(4)	14-1/2(4)	17(4)	17-1/2(4)	21	-	-	21-1/2	19	36	45	54	20
CE30B*		3/8	3/4	14(4)	14-1/2(4)	17(4)	17-1/2(4)	21	-	-	21-1/2	23	41	52	51	12
CE30C*		3/8	3/4	14(4)	14-1/2(4)	17(4)	17-1/2(4)	21	-	-	21-1/2	23	46	58	59	12
CE30D*		3/8	3/4	14(4)	14-1/2(4)	17(4)	17-1/2(4)	21	-	-	21-1/2	27	52	65	77	12
CE30E*		3/8	3/4	14(4)	14-1/2(4)	17(4)	17-1/2(4)	21	-	-	21-1/2	27	54	67	79	12
CE36A*	36,000	3/8	3/4	14(4)	14-1/2(4)	17(4)	17-1/2(4)	21	-	-	21-1/2	23	41	52	61	12
CE36B*		3/8	3/4	14(4)	14-1/2(4)	17(4)	17-1/2(4)	21	-	-	21-1/2	23	46	58	69	12
CE36C*		3/8	3/4	14(4)	14-1/2(4)	17(4)	17-1/2(4)	21	-	-	21-1/2	27	52	65	77	12
CE36D*		3/8	3/4	14(4)	14-1/2(4)	17(4)	17-1/2(4)	21	-	-	21-1/2	27	57	71	84	12
CE36E*		3/8	3/4	14(4)	14-1/2(4)	17(4)	17-1/2(4)	21	-	-	21-1/2	23	41	52	61	12
CE36F*		3/8	3/4	14(4)	14-1/2(4)	17(4)	17-1/2(4)	21	-	-	21-1/2	30	67	84	100	10
CE42A*	42,000	3/8	7/8	-	-	17(4)	17-1/2(4)	21	24	24-1/2	21-1/2	23	46	58	69	12
CE42B*		3/8	7/8	-	-	17(4)	17-1/2(4)	21	24	24-1/2	21-1/2	27	52	65	77	12
CE42C*		3/8	7/8	-	-	17(4)	17-1/2(4)	21	24	24-1/2	21-1/2	27	57	71	84	12
CE42D*		3/8	7/8	-	-	17(4)	17-1/2(4)	21	24	24-1/2	21-1/2	30	62	78	92	10
CE42E*		3/8	7/8	-	-	17(4)	17-1/2(4)	21	24	24-1/2	21-1/2	23	46	58	69	12
CE42F*		3/8	7/8	-	-	17(4)	17-1/2(4)	21	24	24-1/2	21-1/2	30	62	78	92	10
CE48A*	48,000	3/8	7/8	-	-	17(4)	17-1/2(4)	21	24	24-1/2	21-1/2	27	52	65	77	12
CE48B*		3/8	7/8	-	-	17(4)	17-1/2(4)	21	24	24-1/2	21-1/2	27	57	71	84	12
CE48C*		3/8	7/8	-	-	17(4)	17-1/2(4)	21	24	24-1/2	21-1/2	30	62	78	92	10
CE48D*		3/8	7/8	-	-	17(4)	17-1/2(4)	21	24	24-1/2	21-1/2	30	67	84	100	10
CE48F*		3/8	7/8	-	-	17(4)	17-1/2(4)	21	24	24-1/2	21-1/2	30	64	80	94	10
CE48G*		3/8	7/8	-	-	17(4)	17-1/2(4)	21	24	24-1/2	21-1/2	30	69	86	102	10
CE60A*	60,000	3/8	7/8	-	-	-	-	21	24	24-1/2	21-1/2	30	62	78	92	10
CE60B*		3/8	7/8	-	-	-	-	21	24	24-1/2	21-1/2	30	67	84	100	10
CE60C*		3/8	7/8	-	-	-	-	21(2)	24(2)	24-1/2(2)	23(2)	30	70	88	104	10
CE60D*		3/8	7/8	-	-	-	-	21(2)	24(2)	24-1/2(2)	23(2)	35	76	95	112	10
CE60F*		3/8	7/8	-	-	-	-	21	24	24-1/2	21-1/2	30	64	80	94	10

Notes: (1) Do not use plastic drain pans on oil furnaces or other applications where outlet temperature may exceed 290°F +/- 5°F. Metal drain pans are recommended for this type of application. (2) Metal drain pan. (3) Metal drain pan. Slab rotated 90°. Refrigerant and plumbing connections still exit in front. (4) Metal drain pan applicable for 4 row.

In keeping with its commitment to continuous improvement. Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2025 Aspen Manufacturing. All Rights Reserved

Customer Service: info@aspenmfg.com Warranty Team: warranty@aspenmfg.com Phone: 281.441.6500 Toll Free: 800.423.9007 Fax: 281.441.6510