


CH SERIES

COPPER SLAB HORIZONTAL

FEATURES, DIMENSIONS, & SPECIFICATIONS

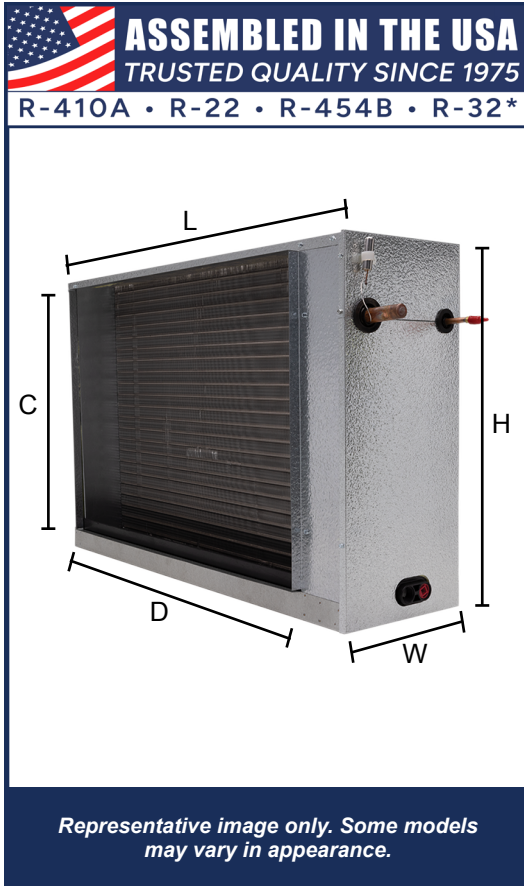

FEATURES AND BENEFITS:

- Rifled copper tubing, enhanced aluminum fins.
- Immersion tested at 500 psi, followed by nitrogen pressurization and factory sealing to ensure optimal system integrity and long-term reliability.
- Refrigerant and plumbing connections.
 - Liquid line: 3/4" ODS
 - Suction line:
 - 3/4" ODS on 1-1/2-ton to 3-ton
 - 7/8" ODS on 3-1/2-ton to 5-ton
- Condensate Drains: 3/4" NPT
- Schrader provided for pressure assurance testing with 3/8" ODS Stem mounted on end of Liquid Line.
- Split access doors in front of cabinet for easy service access.
- Fully insulated cabinets with foil-faced insulation.
- AHRI certifiable with all brands of A/C and heat pump systems.
- ETL listed for use with R-410A, R-454B, R-22, and R-32 when proper metering device is used.
- Ten-year limited warranty with registration.



CUSTOMIZATION

- Factory or field-installed TXV available.



SCAN THE QR CODE FOR MORE INFORMATION ON ASPEN'S CH SERIES COILS

For full warranty details, please visit the [Warranty Information](#) tab on Aspen's website. To quickly find the ideal AHRI-certified match for any Aspen coil, air handler, or Aspen PRO air handler, check out our [AHRI Quick Match tool](#) on the Resources page.



In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligations. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2025 Aspen Manufacturing. CH Spec-2025-05

SPECIFICATIONS & PERFORMANCE DATA (In.)											
COIL MODEL	NOM. CAPACITY (BTUs)	FLOWRATOR SIZE	DIMENSIONS					SHIPPING INFO.			
			CABINET			OPENING		WEIGHT (LBS)			SKID QTY
		R-410A	HEIGHT	WIDTH	LENGTH	C"	D"	# OF ROWS			
			H"	W"	L"			2	3	4	
CH24A*	24,000	0.055	23-1/2	10	21-1/2	21	16	20	34	N/A	14
CH24B*					29-1/2		24	29	43		
CH36A*	36,000	0.068	23-1/2	10	29-1/2	21	24	29	43	N/A	14
CH36B*					35-1/2		30	35	49		
CH48A*	48,000	0.080	23-1/2	10	30	21	30	35	49	N/A	14
CH48B*							36	42	56		8
CH60A*	60,000	0.089	23-1/2	10	36	21	36	N/A	56	70	8
CH60B*							42		66	80	

DRAIN PAN TEMPERATURE TABLE	
DRAIN PAN TYPE	TEMP LIMITS
Plastic - Standard	290°
Plastic - High Temp	425°
Metal - High Temp	600°

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligations. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2025 Aspen Manufacturing. CH Spec-2025-05