

LEM SERIES - AIR HANDLER

HIGH-EFFICIENCY ELECTRIC MULTI-POSITION, ALUMINUM COIL



Unit shown with service panels removed. Representative image only. Some models may vary in appearance.

MODULAR ELECTRIC HEAT KITS

Heat kits available with either circuit breakers or terminal blocks. Available from 3 to 25 KW. Models with electric heat include sequencers and temperature limit switches for safe, efficient operation. Modules are easily installed in the field using molex plugs or can be ordered factory-installed. Controls are accessible from the front for easy service. Electrical connections can be made from the top or left. Disconnect does not protrude through the wall panel. Fan time delay relay standard for increased efficiency.

WARRANTY Ten-year limited warranty with registration. **OPTIONS** Ask your local Aspen Sales Rep for customization options.

APPLICATION VERSATILITY

Upflow or horizontal right as shipped (field convertible for downflow or horizontal left applications). Can be AHRI certified with most brands of air conditioners or heat pumps.

- A2L refrigerants require a Refrigerant Detection System (RDS) for compliance. In accordance to UL 60335 Refrigerant Detection Systems are factory-installed on A2L refrigerant ready air handlers.
- ETL and AHRI listed for R22, R410A, R454B, and R32 refrigerants [A2L refrigerants certified with Refrigerant Detection System (RDS)].

240V CONSTANT TORQUE ECM MOTOR

Pre-programmed, multi-speed, 208V/240V ECM motors that ensure higher efficiency and increased energy savings by delivering constant torque during operation. Motors are pre-programmed with speeds and torques at the factory for optimal performance and reliability. Direct drive blowers circulate air quietly and efficiently. Rail mounted blowers provide easy removal for service and maintenance.

BLOWER

Direct drive blowers circulate air quietly and efficiently. Blowers mounted on rails so they can be easily removed for service.

ELECTRONIC CONTROL BOARD

An electronic board controls the functioning of the system, reducing moving parts. The board provides a blower time delay to maximize heat/cool extraction and offers an integrated fuse for additional protection.

LOW LEAKAGE CABINET

Sturdy, fully insulated galvanized steel cabinet with knockout for duct return. Less than 1.4% air leakage from cabinet when tested in accordance with ASHRAE standard 193. Unit must be installed according to installation instructions.

ALL ALUMINUM COIL

High-efficiency rifled aluminum tubes and enhanced aluminum fins provide maximum heat transfer. All coils factory leak tested with Multi-stage leak testing at 500 psi pressure decay, mass spectrometer tested with Helium, then Nitrogen pressurized and factory sealed optimal system integrity and long-term reliability. Coil mounted Schrader allows pre-installation pressure assurance testing.

Available with either factory-installed orifice or TXV metering device. Field-installable bolt-on TXVs are also available. Access door allows for easy coil cleaning.

CUSTOMIZATION OPTIONS*

DUAL A2L REFRIGERANT TECHNOLOGY FOR R32 & R454B SYSTEMS

Aspen coils and air handlers are engineered with Dual A2L Refrigerant Technology, allowing field configurability for either R32 or R454B refrigerants. Each unit ships with a factory-installed A2L metering device that can be easily swapped at installation, and includes the option for a factory- or field-installed universal Refrigerant Detection System (RDS) compatible with both refrigerants.

OTHER POPULAR CUSTOM OPTIONS:

- Refrigerant Detection System (RDS) kit factory-installed.
- Factory or field-installed TXV available.

DOWNFLOW KIT OPTIONS:

- DWNFLWP-175 (PLASTIC DRAIN PAN)

LEM-HE-SS-AH-008-A



In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2025 Aspen Manufacturing. All Rights Reserved

Customer Service: info@aspenmfg.com Warranty Team: warranty@aspenmfg.com Phone: 281.441.6500 Toll Free: 800.423.9007 Fax: 281.441.6510

LEM SERIES - STANDARD - HEATING/COOLING PERFORMANCE & ELECTRICAL DATA													
MODEL	ELECTRIC HEAT			PERFORMANCE DATA				ELECTRICAL DATA					
	ELECTRIC HEAT KIT MODEL	MIN. MOTOR SPEED TAP	MIN. CFM REQ.	HEATING		HEAT KIT		HEATING CAPACITY		MIN. CIRCUIT AMPACITY		MAX. BREAKER OR FUSE SIZE	
				KW		A		MBTUH		MCA			
				208V	240V	208V	240V	208V	240V	208V	240V	208V	240V
LEM 24A-E LEM 36L	N(C,T)S00	-	-	0.0	0.0	2.8	2.8	0.0	0.0	3.5	3.5	15	15
	N(C,T)S03	T2	630	2.3	3.0	13.6	15.3	7.8	10.2	17.0	19.1	20	20
	N(C,T)S05	T2	630	3.6	4.8	20.1	22.8	12.3	16.4	25.1	28.5	30	30
	N(C,T)S06	T2	630	4.5	6.0	24.4	27.8	15.4	20.5	30.5	34.8	35	35
	N(C,T)S08	T2	630	6.0	8.0	31.6	36.1	20.5	27.3	39.6	45.2	40	50
	N(C,T)S10	T3	750	7.2	9.6	37.4	42.8	24.6	32.8	46.8	53.5	50	60
LEM 24F-K LEM 36A-E LEM 36K,M LEM 48L	N(C,T)M00	-	-	0.0	0.0	4.1	4.1	0.0	0.0	5.1	5.1	15	15
	N(C,T)M03	T3	800	2.3	3.0	14.9	16.6	7.8	10.2	18.6	20.8	20	25
	N(C,T)M05	T3	800	3.6	4.8	21.4	24.1	12.3	16.4	26.8	30.1	30	35
	N(C,T)M06	T3	800	4.5	6.0	25.7	29.1	15.4	20.5	32.2	36.4	35	40
	N(C,T)M08	T3	800	6.0	8.0	32.9	37.4	20.5	27.3	41.2	46.8	45	50
	N(C,T)M10	T4	1060	7.2	9.6	38.7	44.1	24.6	32.8	48.4	55.1	50	60
	N(C,T)M15	T4	1060	7.2/3.6	9.6/4.8	38.7/17.3	44.1/20.0	36.8	49.1	48.4/21.6	55.1/25	50/25	60/25
LEM 36F-J LEM 48A-E *LEM 60A-E *LEM 60K-M	N(C,T)L00	-	-	0.0	0.0	7.6	7.6	0.0	0.0	9.5	9.5	15	15
	N(C,T)L03	T2	1050	2.3	3.0	18.4	20.1	7.8	10.2	23	25.1	25	30
	N(C,T)L05	T2	1050	3.6	4.8	24.9	27.6	12.3	16.4	31.1	34.5	35	35
	N(C,T)L06	T2	1050	4.5	6.0	29.2	32.6	15.4	20.5	36.5	40.8	40	45
	N(C,T)L08	T2	1050	6.0	8.0	36.4	40.9	20.5	27.3	45.6	51.2	50	60
	N(C,T)L10	T2	1050	7.2	9.6	42.2	47.6	24.6	32.8	52.8	59.5	60	60
	N(C,T)L15	T3	1200	7.2/3.6	9.6/4.8	42.2/17.3	47.6/20.0	36.8	49.1	52.8/21.6	59.5/25	60/25	60/25
*N(C,T)L20	T3	1200	7.2/7.2	9.6/9.6	42.2/34.6	47.6/40.0	49.1	65.5	52.8/43.3	59.5/50	60/45	60/50	
LEM 48F-J LEM 60F-J	N(C,T)X00	-	-	0.0	0.0	7.6	7.6	0.0	0.0	9.5	9.5	15	15
	N(C,T)X03	T2	1435	2.3	3.0	18.4	20.1	7.8	10.2	23	25.1	25	30
	N(C,T)X05	T2	1435	3.6	4.8	24.9	27.6	12.3	16.4	31.1	34.5	35	35
	N(C,T)X06	T2	1435	4.5	6.0	29.2	32.6	15.4	20.5	36.5	40.8	40	45
	N(C,T)X08	T2	1435	6.0	8.0	36.4	40.9	20.5	27.3	45.6	51.2	50	60
	N(C,T)X10	T2	1435	7.2	9.6	42.2	47.6	24.6	32.8	52.8	59.5	60	60
	N(C,T)X15	T2	1435	7.2/3.6	9.6/4.8	42.2/17.3	47.6/20.0	36.8	49.1	52.8/21.6	59.5/25	60/25	60/25
	N(C,T)X20	T2	1435	7.2/7.2	9.6/9.6	42.2/34.6	47.6/40.0	49.1	65.5	52.8/43.3	59.5/50	60/45	60/50

LEM SERIES - STANDARD - AIR HANDLER CHASSIS NOMENCLATURE				
LEM	NOM. TONN.	COIL CODE*	METERING DEVICE	OPTION CODE
	MBTUH	D	G	-000
240V CONSTANT TORQUE ECM MULTI- POSITION AIR HANDLER	24 36 48 60	24,000 = A-M 36,000 = A-M 48,000 = A-L 60,000 = A-M	A1 REFRIGERANTS - R410A + R22	CUSTOM OPTIONS
			4 = R410A (TXV NON-BLEED AC/HP) X = R22 (TXV NON-BLEED AC/HP) 6 = R410A (TXV 20% BLEED AC/HP) B = R22 (TXV 20% BLEED AC/HP) F = R22 (FLOWRATOR)	
			A2L REFRIGERANTS - R454B + R32	
			J = R454B (TXV NON-BLEED AC/HP) D = R32 (TXV NON-BLEED AC/HP) K = R454B (TXV 20% BLEED AC/HP) M = R32 (PISTON) Z = R454B/R32 CONFIGURABLE N = R454B (PISTON) (Shipped with R454B Piston)	

*Coil Code = SLAB SIZE, DEPTH, ROWS

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2025 Aspen Manufacturing. All Rights Reserved

Customer Service: info@aspenmfg.com Warranty Team: warranty@aspenmfg.com Phone: 281.441.6500 Toll Free: 800.423.9007 Fax: 281.441.6510

LEM SERIES - STANDARD - ELECTRIC HEAT KIT NOMENCLATURE			
HEAT KIT SERIES	POWER CONNECTION	CABINET SIZE & NOM. TON.	HEAT STRIP
N	C	S/M/L/X	##
ELECTRIC HEAT	C = CIRCUIT BREAKER T = TERMINAL BLOCK	S = 24(A-E), 36L	00 = 0 KW 05 = 5 KW 08 = 8 KW 03 = 3 KW 06 = 6 KW 10 = 10 KW
		M = 24(F-K), 48 (K-L), 36(A-E)	00 = 0 KW 06 = 6 KW 15 = 15 KW 03 = 3 KW 08 = 8 KW
		L = 36(F-J), 48(A-E), 60(A-E)*, 60(K-M)*	05 = 5 KW 10 = 10 KW
		X = 48(F-J), 60(F-J)	00 = 0 KW 06 = 6 KW 15 = 15 KW 03 = 3 KW 08 = 8 KW 20 = 20 KW 05 = 5 KW 10 = 10 KW


NOTE: * = The N(C/T)L20 is only available for the LEM60(A-E) & LEM60(K-M)

LEM SERIES - STANDARD - BLOWER DATA													
MODEL	SPEED TAP	240V ECM MOTOR		CFM VS EXTERNAL STATIC									
		HP	AMPS	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
LEM 24A-E	T5	1/3	2.8	1030	1000	975	945	910	880	865	830	795	750
	T4	1/3	2.8	975	945	910	880	865	830	795	775	715	700
	T3	1/3	2.8	845	810	780	755	725	705	665	635	600	550
	T2	1/3	2.8	775	745	725	700	665	645	610	575	525	465
	T1	1/3	2.8	645	620	590	565	550	510	480	420	370	330
LEM 36L	T5	1/3	2.8	1250	1225	1200	1175	1150	1125	1050	960	-	-
	T4	1/3	2.8	1160	1140	1115	1090	1075	1030	1000	975	900	-
	T3	1/3	2.8	925	900	865	845	810	775	745	710	695	650
	T2	1/3	2.8	810	770	740	710	680	655	620	590	550	510
	T1	1/3	2.8	650	640	610	575	540	510	475	420	380	345
LEM24F-M LEM36A-E LEM36K,M LEM48K	T5	1/2	4.1	1320	1300	1285	1265	1225	1200	1165	1130	1100	1070
	T4	1/2	4.1	1150	1130	1115	1090	1060	1020	975	945	880	810
	T3	1/2	4.1	930	910	875	845	800	765	675	625	590	540
	T2	1/2	4.1	825	790	755	720	675	600	550	510	485	440
	T1	1/2	4.1	745	725	675	645	565	525	480	445	400	350
LEM 48L	T5	1/2	4.1	1375	1340	1315	1300	1255	1200	1150	1120	1090	1050
	T4	1/2	4.1	1175	1150	1125	1075	1075	1045	990	960	900	845
	T3	1/2	4.1	915	900	880	850	800	765	705	665	620	590
	T2	1/2	4.1	850	830	780	730	675	635	585	550	510	450
	T1	1/2	4.1	725	705	675	620	565	530	485	460	415	380
LEM36F-J LEM48A-E LEM60A-E	T5	1	7.6	1690	1650	1630	1610	1600	1590	1570	1550	1515	1500
	T4	1	7.6	1580	1460	1435	1420	1400	1370	1350	1325	1275	1250
	T3	1	7.6	1300	1275	1260	1240	1200	1165	1130	1100	1075	1050
	T2	1	7.6	1175	1160	1130	1090	1050	1000	960	930	900	860
	T1	1	7.6	1020	975	945	900	850	810	775	715	695	650
LEM 60C	T5	1	7.6	1750	1730	1695	1655	1630	1570	1520	1475	1450	1415
	T4	1	7.6	1560	1520	1475	1435	1435	1375	1350	1325	1275	1250
	T3	1	7.6	1350	1300	1275	1225	1200	1175	1125	1100	1060	1030
	T2	1	7.6	1175	1140	1100	1075	1050	1000	975	928	895	790
	T1	1	7.6	990	940	910	880	850	790	775	675	620	600
LEM 60K-M	T5	1	7.6	2080	2050	2025	2000	1965	1935	1910	1880	1845	1825
	T4	1	7.6	1990	1965	1940	1910	1885	1855	1825	1790	1760	1725
	T3	1	7.6	1855	1830	1795	1775	1745	1710	1680	1645	1615	1580
	T2	1	7.6	1575	1540	1510	1475	1435	1400	1360	1320	1280	1240
	T1	1	7.6	1380	1345	1305	1265	1225	1175	1135	1085	1040	990
LEM48F-J LEM60F-J	T5	1	7.6	2130	2090	2050	2005	1965	1920	1875	1855	1830	1780
	T4	1	7.6	1990	1950	1910	1860	1815	1775	1745	1710	1675	1635
	T3	1	7.6	1815	1760	1725	1675	1615	1600	1560	1520	1475	1415
	T2	1	7.6	1635	1595	1560	1500	1435	1415	1370	1300	1200	1125
	T1	1	7.6	1480	1435	1370	1325	1275	1230	1150	1040	980	925

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2025 Aspen Manufacturing. All Rights Reserved

Customer Service: info@aspenmfg.com Warranty Team: warranty@aspenmfg.com Phone: 281.441.6500 Toll Free: 800.423.9007 Fax: 281.441.6510

LEM SERIES - LEGACY

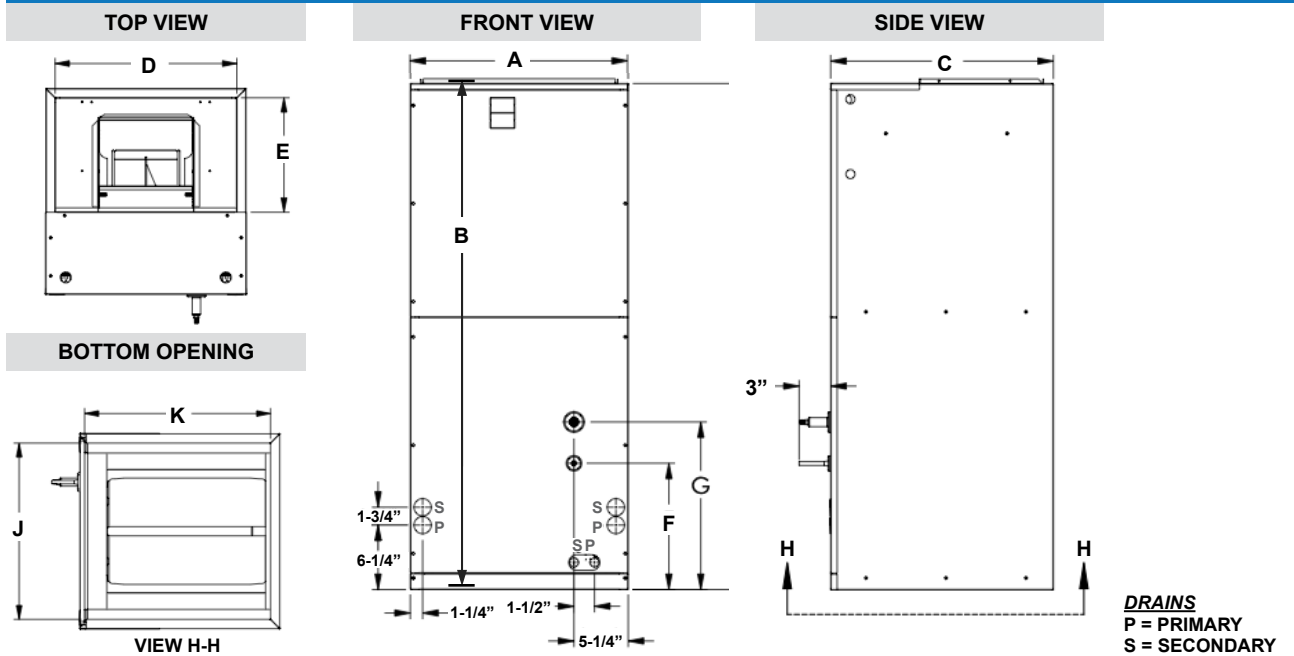

LEM SERIES - LEGACY - DIMENSIONS (In.)[mm.] - FIGURE 1

MODEL	A	B	C	D	E	F	G	J	K	FILTER	SHIPPING INFO	
										1" DEPTH	WEIGHT	QTY
LEM24A	14.5 [368]	40 [1016]	21.5 [546]	12.5 [318]	12 [304]	5 [127]	9 [229]	12.5 [218]	20 [508]	12X20	92	6
LEM24B	14.5 [368]	40 [1016]	21.5 [546]	12.5 [318]	12 [304]	9 [229]	5 [127]	12.5 [218]	20 [508]	12X20	92	6
LEM24C	14.5 [368]	40 [1016]	21.5 [546]	12.5 [318]	12 [304]	4 [102]	7 [178]	12.5 [218]	20 [508]	12X20	92	6
LEM24D	14.5 [368]	40 [1016]	21.5 [546]	12.5 [318]	12 [304]	5 [127]	9 [229]	12.5 [218]	20 [508]	12X20	92	6
LEM24E	14.5 [368]	40 [1016]	21.5 [546]	12.5 [318]	12 [304]	4 [102]	7 [178]	12.5 [218]	20 [508]	12X20	92	6
LEM36L	14.5 [368]	40 [1016]	21.5 [546]	12.5 [318]	12 [304]	5 [127]	9 [229]	12.5 [218]	20 [508]	12X20	92	6
LEM24F/36A	17.5 [445]	46 [1168]	21.5 [546]	15.5 [394]	12 [304]	10 [254]	13 [330]	15.5 [394]	20 [508]	14x20	115	4
LEM24G/36B/48K	17.5 [445]	46 [1168]	21.5 [546]	15.5 [394]	12 [304]	4 [102]	7 [178]	15.5 [394]	20 [508]	14x20	115	4
LEM24H/36C	17.5 [445]	46 [1168]	21.5 [546]	15.5 [394]	12 [304]	5 [127]	9 [229]	15.5 [394]	20 [508]	14x20	115	4
LEM24I/36D	17.5 [445]	46 [1168]	21.5 [546]	15.5 [394]	12 [304]	8 [203]	11 [279]	15.5 [394]	20 [508]	14x20	115	4
LEM24J/36E	17.5 [445]	46 [1168]	21.5 [546]	15.5 [394]	12 [304]	10 [254]	13 [330]	15.5 [394]	20 [508]	14x20	115	4
LEM24K	17.5 [445]	46 [1168]	21.5 [546]	15.5 [394]	12 [304]	6.5 [165]	10 [254]	15.5 [394]	20 [508]	14x20	115	4
LEM48L	17.5 [445]	46 [1168]	21.5 [546]	15.5 [394]	12 [304]	10 [254]	13 [330]	15.5 [394]	20 [508]	14x20	115	4
LEM36F/48A	21 [533]	49 [1245]	21.5 [546]	19 [483]	12 [304]	9 [229]	12 [305]	19 [483]	20 [508]	16X20	151	4
LEM36G/48B	21 [533]	49 [1245]	21.5 [546]	19 [483]	12 [304]	7 [178]	10 [254]	19 [483]	20 [508]	16X20	151	4
LEM36H/48C	21 [533]	49 [1245]	21.5 [546]	19 [483]	12 [304]	9 [229]	12 [305]	19 [483]	20 [508]	16X20	151	4
LEM36I/48D	21 [533]	49 [1245]	21.5 [546]	19 [483]	12 [304]	10 [254]	14 [356]	19 [483]	20 [508]	16X20	151	4
LEM36J/48E	21 [533]	49 [1245]	21.5 [546]	19 [483]	12 [304]	12 [305]	16 [406]	19 [483]	20 [508]	16X20	151	4
LEM60A	21 [533]	57 [1448]	21.5 [546]	19 [483]	12 [304]	18 [457]	22 [559]	19 [483]	20 [508]	16X20	173	4
LEM60B	21 [533]	57 [1448]	21.5 [546]	19 [483]	12 [304]	12 [305]	16 [406]	19 [483]	20 [508]	16X20	173	4
LEM60C	21 [533]	57 [1448]	21.5 [546]	19 [483]	12 [304]	14 [356]	18 [457]	19 [483]	20 [508]	16X20	173	4
LEM60D	21 [533]	57 [1448]	21.5 [546]	19 [483]	12 [304]	16 [406]	20 [508]	19 [483]	20 [508]	16X20	173	4
LEM60E	21 [533]	57 [1448]	21.5 [546]	19 [483]	12 [304]	18 [457]	22 [559]	19 [483]	20 [508]	16X20	173	4
LEM60K	21 [533]	57 [1448]	21.5 [546]	19 [483]	12 [304]	12 [305]	16 [406]	19 [483]	20 [508]	16X20	173	4
LEM60L	21 [533]	57 [1448]	21.5 [546]	19 [483]	12 [304]	14 [356]	18 [457]	19 [483]	20 [508]	16X20	173	4
LEM60M	21 [533]	57 [1448]	21.5 [546]	19 [483]	12 [304]	16 [406]	20 [508]	19 [483]	20 [508]	16X20	173	4
LEM48F/60F	24.5 [622]	57 [1448]	21.5 [546]	22.5 [572]	10.5 [267]	18 [457]	22 [559]	22.5 [572]	20 [508]	20X20	180	4
LEM48G/60G	24.5 [622]	57 [1448]	21.5 [546]	22.5 [572]	10.5 [267]	12 [305]	16 [406]	22.5 [572]	20 [508]	20X20	180	4
LEM48H/60H	24.5 [622]	57 [1448]	21.5 [546]	22.5 [572]	10.5 [267]	14 [356]	18 [457]	22.5 [572]	20 [508]	20X20	180	4
LEM48I/60I	24.5 [622]	57 [1448]	21.5 [546]	22.5 [572]	10.5 [267]	16 [406]	20 [508]	22.5 [572]	20 [508]	20X20	180	4
LEM48J/60J	24.5 [622]	57 [1448]	21.5 [546]	22.5 [572]	10.5 [267]	18 [457]	22 [559]	22.5 [572]	20 [508]	20X20	180	4

In keeping with its commitment to continuous improvement, Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2025 Aspen Manufacturing. All Rights Reserved

Customer Service: info@aspenmfg.com Warranty Team: warranty@aspenmfg.com Phone: 281.441.6500 Toll Free: 800.423.9007 Fax: 281.441.6510