




ASPEN
MANUFACTURING

373 ATASCOCITA RD. • HUMBLE, TX • 77396
TEL (281) 441-6500 • FAX (281) 441-6510
<< www.aspenmfg.com >>

DIMENSIONS AND SPECIFICATIONS

Aspen VersaCoil Cased Multi-Position Coils

Designed for Armstrong GU(C)J, GU(C)K, and GHJ Furnaces

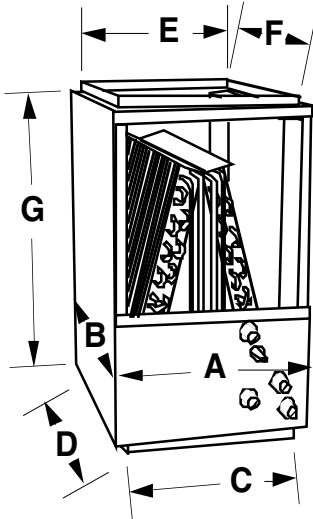

GENERAL SPECIFICATIONS

(Coil shown in vertical configuration with front access panel removed.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Right-hand refrigerant and plumbing connections.
- Three 3/4" MPT condensate drains. Dual drain in vertical or horizontal position.
- No field-modification required for multi-position applications.
- Factory pre-installed powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

ARMSTRONG FURNACE MODEL	ASPEN COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
GU (C)J050D10, D12	BV1** 24	BDB19	14-3/4	21	13-3/4	19-1/2	12-5/8	17-7/8	19
	BVR** 24	BDB19	14-3/4	21	13-3/4	19-1/2	12-5/8	17-7/8	19
GHJ050D10, 075D09	BV1** 30	BDB19	14-3/4	21	13-3/4	19-1/2	12-5/8	17-7/8	19
	BVR** 30	BDB19	14-3/4	21	13-3/4	19-1/2	12-5/8	17-7/8	19
GU(C)J050D14, 075D10, 075D14, 100D12	BV1** 24	BDC21	17-3/4	21	16-3/4	19-1/2	15-5/8	17-7/8	21
	BVR** 24	BDC15	17-3/4	21	16-3/4	19-1/2	15-5/8	17-7/8	15
	BV1** 30	BDC21	17-3/4	21	16-3/4	19-1/2	15-5/8	17-7/8	21
	BVR** 30	BDC21	17-3/4	21	16-3/4	19-1/2	15-5/8	17-7/8	21
	BV5** 36	BDC21	17-3/4	21	16-3/4	19-1/2	15-5/8	17-7/8	21
GU(C)K050D10, 050D12	BVR** 36	BDC21	17-3/4	21	16-3/4	19-1/2	15-5/8	17-7/8	21
	BV5** 42	BDC27	17-3/4	21	16-3/4	19-1/2	15-5/8	17-7/8	27
GHJ050D14, 075D14	BVR** 42	BDC21	17-3/4	21	16-3/4	19-1/2	15-5/8	17-7/8	21
	BV1** 48	BDC27	17-3/4	21	16-3/4	19-1/2	15-5/8	17-7/8	27
	BV5** 48	BDC27	17-3/4	21	16-3/4	19-1/2	15-5/8	17-7/8	27
GU(C)J100D14, 125D14	BV1** 30	BDD23	22-1/4	21	21-1/4	19-1/2	20-1/4	17-7/8	23
	BVR** 30	BDD17	22-1/4	21	21-1/4	19-1/2	20-1/4	17-7/8	17
	BV5** 36	BDD23	22-1/4	21	21-1/4	19-1/2	20-1/4	17-7/8	23
	BVR** 36	BDD23	22-1/4	21	21-1/4	19-1/2	20-1/4	17-7/8	23
GU(C)K075D14, 100D14	BV5** 42	BDD23	22-1/4	21	21-1/4	19-1/2	20-1/4	17-7/8	23
	BVR** 42	BDD23	22-1/4	21	21-1/4	19-1/2	20-1/4	17-7/8	23
GHJ075D16, 100D14, 100D20, 125D20	BV1** 48	BDD29	22-1/4	21	21-1/4	19-1/2	20-1/4	17-7/8	29
	BV5** 48	BDD29	22-1/4	21	21-1/4	19-1/2	20-1/4	17-7/8	29
	BVR** 48	BDD23	22-1/4	21	21-1/4	19-1/2	20-1/4	17-7/8	23
	BV1** 60	BDD29	22-1/4	21	21-1/4	19-1/2	20-1/4	17-7/8	29
	BV2** 60	BDD29	22-1/4	23	21-1/4	19-1/2	20-1/4	17-7/8	29
GU(C)J100D20, 125D20, 150D20	BV7** 60	BDD29	22-1/4	21	21-1/4	19-1/2	20-1/4	17-7/8	29
	BV5** 42	BDE23	26-3/4	21	25-3/4	19-1/2	24-5/8	17-7/8	23
	BVR** 42	BDE23	26-3/4	21	25-3/4	19-1/2	24-5/8	17-7/8	23
	BV1** 48	BDE29	26-3/4	21	25-3/4	19-1/2	24-5/8	17-7/8	29
	BV5** 48	BDE29	26-3/4	21	25-3/4	19-1/2	24-5/8	17-7/8	29
	BVR** 48	BDE23	26-3/4	21	25-3/4	19-1/2	24-5/8	17-7/8	23
	BV1** 60	BDE29	26-3/4	21	25-3/4	19-1/2	24-5/8	17-7/8	29
	BV7** 60	BDE29	26-3/4	21	25-3/4	19-1/2	24-5/8	17-7/8	29
	BV2** 60	BDF29	26-3/4	23	25-3/4	19-1/2	24-5/8	17-7/8	29

Versa Spec-Armstrong B. Effective 5/15/00. Supersedes all previous versions. Subject to change without notice.