




**ASPEN**  
MANUFACTURING

373 ATASCOCITA RD. • HUMBLE, TX • 77396  
TEL (281) 441-6500 • FAX (281) 441-6510  
<< www.aspenmfg.com >>

## DIMENSIONS AND SPECIFICATIONS

### Aspen VersaCoil Cased Multi-Position Coils

Designed for Lennox G26 Up-Flow and GHR26 Furnaces

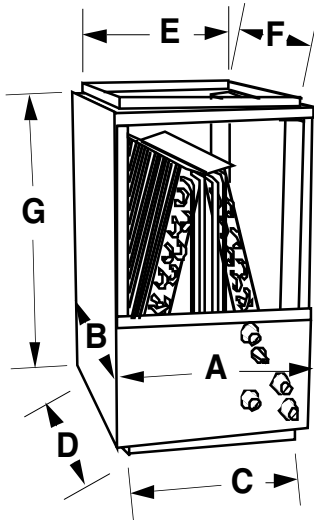

#### GENERAL SPECIFICATIONS

(Coil shown in vertical configuration with front access panel removed.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS.
- Right-hand refrigerant and plumbing connections.
- Three 3/4" MPT condensate drains. Dual drain in vertical or horizontal position.
- No field-modification required for multi-position applications.
- Factory pre-installed powder-painted metal drain pan. Stainless available.
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Front access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Heavy gauge embossed galvanized cabinets fully lined with 1/2" faced insulation.
- Flush-fits furnace in most applications.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

LENNOX FURNACE MODEL	ASPEN COIL MODEL	SUFFIX	FOOTPRINT		BOTTOM OPENING		TOP OPENING		HEIGHT
			A	B	C	D	E	F	
G26Q2-50, Q3-50, Q3-75  GHR26Q2/3-50, Q3-75	BV1** 24	BNM19	16-1/4	21	14-3/8	19-1/8	12-5/8	18-5/8	19
	BV1** 30	BNM19	16-1/4	21	14-3/8	19-1/8	12-5/8	18-5/8	19
	BV1** 36	BNM23	16-1/4	21	14-3/8	19-1/8	12-5/8	18-5/8	23
	BV5** 36	BNM23	16-1/4	21	14-3/8	19-1/8	12-5/8	18-5/8	23
	BV1** 42	BNM29	16-1/4	21	14-3/8	19-1/8	12-5/8	18-5/8	29
	BV5** 42	BNM23	16-1/4	21	14-3/8	19-1/8	12-5/8	18-5/8	23
	BV1** 48	BNM29	16-1/4	21	14-3/8	19-1/8	12-5/8	18-5/8	29
	BV5** 48	BNM29	16-1/4	21	14-3/8	19-1/8	12-5/8	18-5/8	29
G26Q4/5-75, Q3/4-100, Q4/5-100  GHR26Q3/4-100, Q4/5-100, Q4/5-120	BV1** 36	BNN23	21-1/4	21	19-3/8	19-1/8	17-5/8	18-5/8	23
	BV5** 36	BNN23	21-1/4	21	19-3/8	19-1/8	17-5/8	18-5/8	23
	BV1** 42	BNN29	21-1/4	21	19-3/8	19-1/8	17-5/8	18-5/8	29
	BV5** 42	BNN23	21-1/4	21	19-3/8	19-1/8	17-5/8	18-5/8	23
	BV1** 48	BNN29	21-1/4	21	19-3/8	19-1/8	17-5/8	18-5/8	29
	BV5** 48	BNN29	21-1/4	21	19-3/8	19-1/8	17-5/8	18-5/8	29
	BV2** 60	BN129	21-1/4	23	19-3/8	19-1/8	17-5/8	18-5/8	29
	BV7** 60	BNN29	21-1/4	21	19-3/8	19-1/8	17-5/8	18-5/8	29
G26Q3/4-125, Q4/5-125	BV1** 42	BNP29	26-1/4	21	24-3/8	19-1/8	22-5/8	18-5/8	29
	BV5** 42	BNP23	26-1/4	21	24-3/8	19-1/8	22-5/8	18-5/8	23
	BV1** 48	BNP29	26-1/4	21	24-3/8	19-1/8	22-5/8	18-5/8	29
	BV5** 48	BNP29	26-1/4	21	24-3/8	19-1/8	22-5/8	18-5/8	29
	BV2** 60	BNQ29	26-1/4	23	24-3/8	19-1/8	22-5/8	18-5/8	29
	BV7** 60	BNP29	26-1/4	21	24-3/8	19-1/8	22-5/8	18-5/8	29