




ASPEN
MANUFACTURING

373 ATASCOCITA RD. • HUMBLE, TX • 77396
TEL (281) 441-6500 • FAX (281) 441-6510
<< www.aspenmfg.com >>

DIMENSIONS AND SPECIFICATIONS

Aspen BB Series Horizontal Coils with Ductboard Plenums

Designed to Fit York P3HU Furnaces

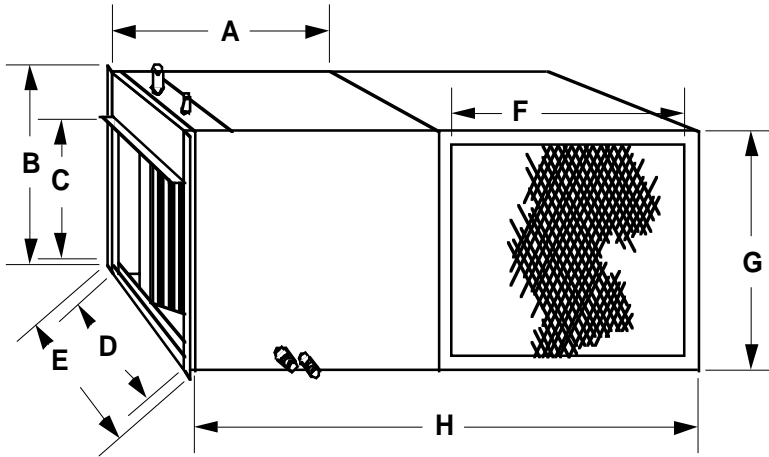

COIL SPECIFICATIONS

(Representative drawing only. Some models may vary in appearance.)

- Standard refrigerant connections: liquid line - 3/8" ODS, suction line - 7/8" ODS
- Refrigerant lines exit from the top of the coil.
- Four 3/4" FPT galvanized condensate drains (two per side).
- Powder-painted galvanized steel drain pan.
- Inlet and outlet dimensions are identical (without end caps).
- Five-year warranty.
- Flowrater standard. Factory or field-installable TXV available.
- Top access panel for easy service.
- Every coil immersion-tested at 500 psi, then nitrogen-pressurized and sealed.
- Rifled copper tubing, enhanced aluminum fins.
- ARI certifiable with all brands of A/C and heat pump systems.
- ETL listed.

OPTIONAL PLENUM SPECIFICATIONS

- Slips over either end of coil.
- Rectangular shape offers maximum surface area for duct connections.
- Plenum sides and top constructed of foil-backed fiberglass ductboard or sheet metal.
- Plenum end and bottom constructed of galvanized steel.

YORK FURNACE MODEL	COIL + PLENUM MODEL	END CAP MODEL	COIL OVERALL		COIL INLET (END CAPS INSTALLED)		COIL WIDTH	PLENUM		COIL + PLENUM SIZE	WT (LBS)
			A	B	C	D		E	F		
P3HUD*	BBH 72+PLH 72	YORK06	28-3/4	26-3/4	24-1/2	20-1/4	22	17-3/4	26-7/8	46	90
	BBH 90+PLH 90	YORK06	32-3/4	26-3/4	24-1/2	20-1/4	22	17-3/4	26-7/8	50	100
	BBH 120+PLH 120	YORK06	36-3/4	26-3/4	24-1/2	20-1/4	22	17-3/4	26-7/8	54	120

BB +PL Spec-York P3HU Comm'l 2. Effective 10/7/02. Supercedes all previous versions. Subject to change without notice.